

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234 Email: geninfo@federalir

1 ux. 000 -	727 3237
Email: ge	ninfo@federalind.com
Website:	www.federalind.com

Project Name:		AIA#
Item #:		
Model #:	Qty:	SIS#
Annroval:		

COUNTERTOP REFRIGERATED SELF-SERVE MERCHANDISER - BOTTOM MOUNT

The Signature Series counter top merchandiser combines attractive curved glass styling and merchandising flexibility. Designed for continuous case line-ups.





OPTIONAL ACCESSORIES

- ☐ Glass Shelves
- $\hfill \square$ Reflective Ends
- □ Reflective Rear Doors
- ☐ Remote Refrigeration (EEV Included) on CRB Models Only
- □ LED Lighting

MODEL DIMENSIONS (Includes End Panels) □ CRB3628SS 36 × 29.7 × 41.2 (in) 914 × 754 × 1045 (mm) □ CRB4828SS 48 × 29.7 × 41.2 (in) 1219 × 754 × 1045 (mm)

STANDARD FEATURES

Model Features

- Curved glass styling.
- Adjustable black metal shelf. Adjustable up and down and can also be tilted in two positions.
- Tempered front glass with self-serve cut out for customer access. Acrylic end panels.
- Removable sliding rear doors, shelf light, shelf supports, and shelf.
- Removable, scratch-resistant, rustproof black display deck.
- Easily accessible light switch and adjustable temperature control.
- Black painted metal and stainless construction. Black trim.
- Designed for continuous line-ups.
- Cord and plug (NEMA 5-15P).
- Installation Flexibility
- Recessed 3" in the counter with condensing component mounted underneath (CRB Models).

Refrigeration

- Average case temperature of 38° F (3.3° C) to 40° F (4.4° C) is maintained.
- Thermometer.
- R290 Refrigerant

Shelving

 Adjustable black metal shelf. Adjustable up and down and can also be tilted in two positions.

Lighting

• 3500K LED top light and shelf lights.

Agency Approvals

- UL Safety and UL Sanitation Listed
- DOE 2017 Compliant





AIA#

SIS#

COUNTERTOP REFRIGERATED SELF-SERVE MERCHANDISER - BOTTOM MOUNT


Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

20.0	0.011									
Zo	one	Intended Product To Be Displayed	Avg Prod Temp °F/°C							
А	All	Packaged Refrigerated Products	38°F / (3.3°C)							

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

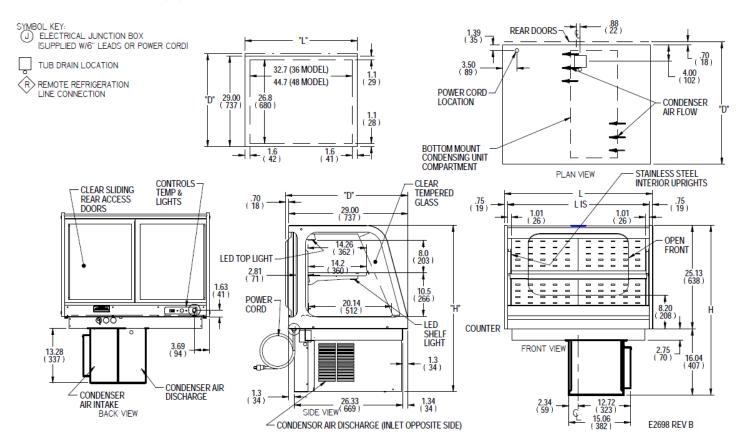

_									SELF CONTAINED					
	DIMENSION			SH	SHELVING		INITEDIO D	ELECTRICAL					SHIP	
	L	D	Ι	LS	# OF TIERS	D	L	VOLUME CU FT	1 2-WIRE + GROUND 120/60/1 I			DEEDLOEDANT	CONDENSATE	WEIGHT
MODEL	in	in	in	in		in	in		AMPS	MAX	STANDARD NEMA	REFRIGERANT	REMOVAL	LBS
	mm	mm	mm	mm		mm	mm			FUSE SIZE	CORD & PLUG			KILO
CRB3628SS	36.0	29.7	41.2	34.5	1	14.2	32.7	6.57	6	15 NEMA 5-15p	NEMA E 1En	R290a	CONDENSATE	400 LBS
	914	754	1045	876		361	831				N290a	EVAPORATOR	181 KILO	
CRB4828SS	48.0	29.7	41.2	46.5	1	14.2	44.7	t 8.85 l	6	15	NEMA 5-15p	R290a	CONDENSATE	460 LBS
	1219	754	1045	1181	1	361	1136						EVAPORATOR	209 KILO

- * Height above counter
- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.









Email: Geninfo@Federalind.com **Website:** Federalind.com