



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company
215 Federal Avenue
Belleville, WI 53508-9201
Phone: 800-356-4206
Fax: 608-424-3234
Email: geninfo@federalind.com
Website: www.federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA#

SIS#

SIGNATURE SERIES REFRIGERATED COUNTER TOP MERCHANDISER

COUNTER TOP SIGNATURE SERIES REFRIGERATED REAR MOUNT

MODEL	DIMENSIONS (Includes End Panels)
<input type="checkbox"/> CRR3628	36 x 29.7 x 27.83 (in) 914 x 754 x 707 (mm)
<input type="checkbox"/> CRR4828	48 x 29.7 x 27.83 (in) 1219 x 754 x 707 (mm)

The Signature Series counter top merchandiser combines attractive curved glass styling and merchandising flexibility. Designed for continuous case line-ups.



REFRIGERATED BOTTOM MOUNT

MODEL	DIMENSIONS (Includes End Panels)
<input type="checkbox"/> CRB3628	36 x 29.7 x 25.12 (in) 914 x 754 x 638 (mm)
<input type="checkbox"/> CRB4828	48 x 29.7 x 25.12 (in) 1219 x 754 x 638 (mm)

STANDARD FEATURES

Model Features

- Curved glass styling.
- Tempered thermopane front glass. Acrylic end panels.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Removable, scratch-resistant, rustproof black display deck.
- Easily accessible light switch and adjustable temperature control.
- Average case temperature of 38° F to 40° F is maintained.
- Black painted metal and stainless construction. Black trim.
- Designed for continuous line-ups.
- Cord and plug (NEMA 5-15P).
- Installation Flexibility
- Set directly on counter with condensing component mounted on rear (CRR Models).
- Recessed 3" in the counter with condensing component mounted underneath (CRB Models).

Refrigeration

- Condensate evaporator provided for a totally selfcontained system.
- Oversized coil and low-velocity fan system maintains high humidity and product freshness.
- Average case temperature of 38° F (3.3° C) to 40° F (4.4° C) is maintained.
- Thermometer.
- R290 Refrigerant

Shelving

- Adjustable black wire shelves. Shelves are adjustable up and down and can also be tilted in two positions. Two tiers.

Lighting

- 3500K LED top light and shelf lights.

Agency Approvals

- UL Safety and UL Sanitation Listed.
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

- Glass Shelves
- Reflective Ends
- Remote Refrigeration on CRB models only
- Reflective Rear Doors
- Chocolate Package



WARRANTY*
One year Parts and Labor
2nd thru 5th year part
only service compressor
(U.S.A and Canada)

Note: Information is subject to change at any time.
Visit www.federalind.com for the most current specs.

Revised 02/18/2020

AIA#

SIGNATURE SERIES REFRIGERATED COUNTER TOP MERCHANDISER

SIS#


Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

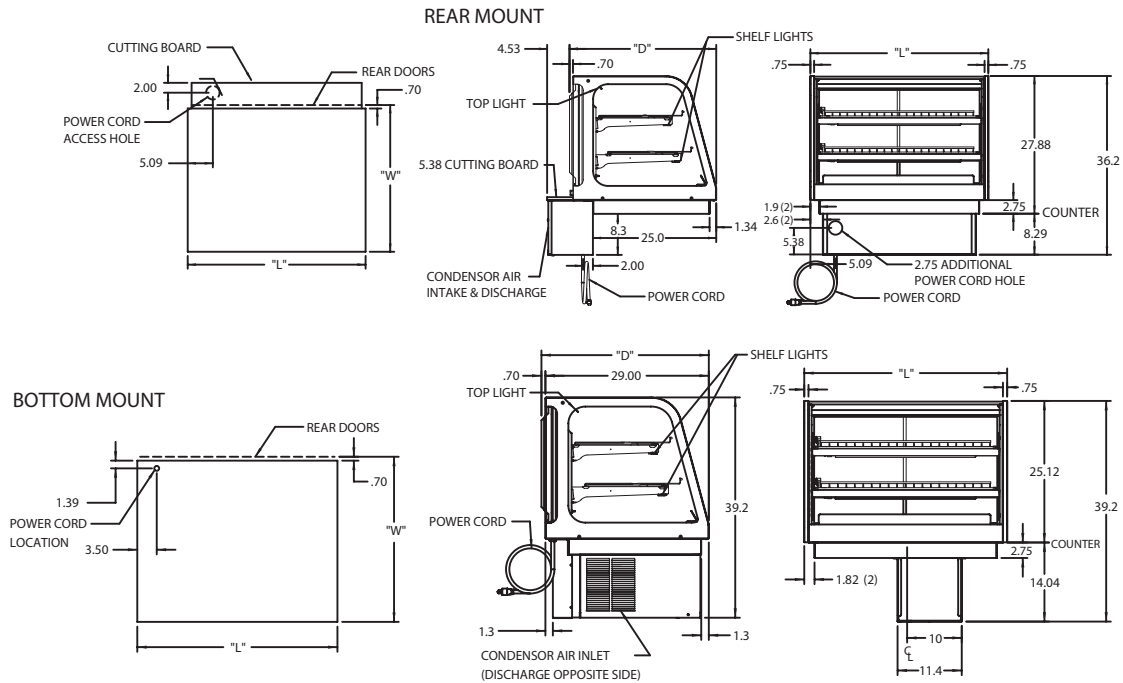

MODEL	DIMENSIONS*				SHIPPING WHT		SELF-CONTAINED 120/60/1	REMOTE 120/60/1 REAR MOUNT
	L	D	H1	UNITS	LBS	KILO		
REAR MOUNT								
CRR3628	36	29.7	27.83	in.	430	195	8.1 AMPS	1.5 AMPS
	914	754	707	mm.				
CRR4828	48	29.7	27.83	in.	500	227	8.3 AMPS	1.5 AMPS
	1219	754	707	mm.				
BOTTOM MOUNT								
CRB3628	36	29.7	25.12	in.	430	195	8.1 AMPS	3.6 AMPS
	914	754	638	mm.				
CRB4828	48	29.7	25.12	in.	500	227	8.3 AMPS	3.8 AMPS
	1219	754	638	mm.				

* Height above counter

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.

DOE 2017
Energy Efficiency
Compliant



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com