

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201 Phone: 800-356-4206 Fax: 608-424-3234 Email: geninfo@federalind.com Website: www.federalind.com

Project Name:	

Item #:

Model #: _____ Qty: _____

SIS#

AIA#

Approval:

ELEMENTS CURVED GLASS NON-REFRIGERATED BAKERY CASE

Curved-glass styling with presentation and value in mind without sacrificing performance.



MODEL	DIMENSIONS (Includes End Panels)
🗆 ECGD50	50.13 x 35.31 x 48 (in)
	1273 x 897 x 1219 (mm)
🗆 ECGD59	59.13 x 35.31 x 48 (in)
	1502 x 897 x 1219 (mm)
🗆 ECGD77	77.13 x 35.31 x 48 (in)
	1959 x 897 x 1219 (mm)

STANDARD FEATURES

Model Features

- Curved glass.
- Tempered thermopane tilt-out front glass.
- Tempered thermopane glass ends, sides and doors.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Steel base construction, textured black powder coat finish.
- Stainless steel top and sides.
- Removable white display deck.
- Light switch and adjustable temperature control.
- Cord and plug.
- Adjustable Leg Levelers

Shelving

• Adjustable white wire shelves, 3 tiers, can also be tilted.

Lighting

- 3000K LED top light and shelf lights.
- DLC Certified, IP66 rated.

Agency Approvals

- UL Safety and UL Sanitation Listed.
- DOE 2017 Compliant.







WARRANTY* One year Parts and Labor 2nd thru 5th year part only service compressor (U.S.A and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs. AIA#

SIS#


ELEMENTS CURVED GLASS NON-REFRIGERATED BAKERY CASE

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.						
Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C				
All	Packaged Refrigerated Products	38°F / (3.3°C)				

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

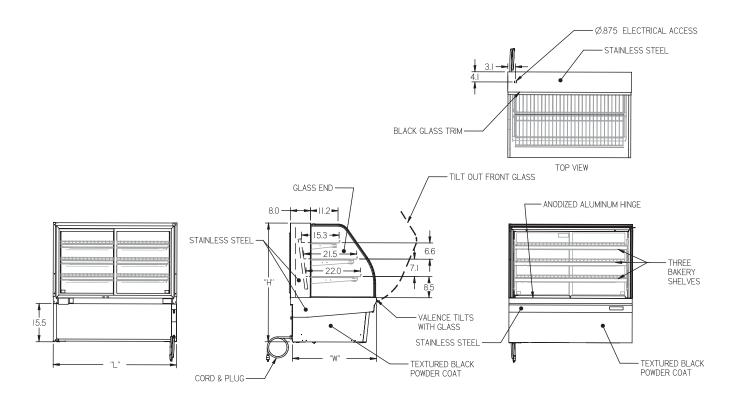

MODEL	DIMENSIONS			SHIPPING WHT		ELECTRICAL	
	L	D	H1	UNITS	LBS	KILO	120/60/1
ECGD50	50.13	35.31	48	in.	500	227	1.5 AMPS
	1273	897	1219	mm.			
ECGD59	59.13	35.31	48	in.	535	243	1.5 AMPS
	1502	897	1219	mm.			
ECGD77	77.13	35.31	48	in.	715	324	1.5 AMPS
	1959	897	1219	mm.			

Due to continuing engineering improvements, specifications are subject to change without notice.

DOE 2017 Energy Efficiency Compliant



FEDERAL INDUSTRIES A Standex Company 215 Federal Avenue Belleville, Wisconsin 53508-9201 Phone: 800-356-4206 Fax: 608-424-3234 Email: Geninfo@Federalind.com Website: Federalind.com