

AIA#

ELEMENTS COUNTERTOP REFRIGERATED SERVICE & SELF-SERVE MERCHANDISERS

SIS#


Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

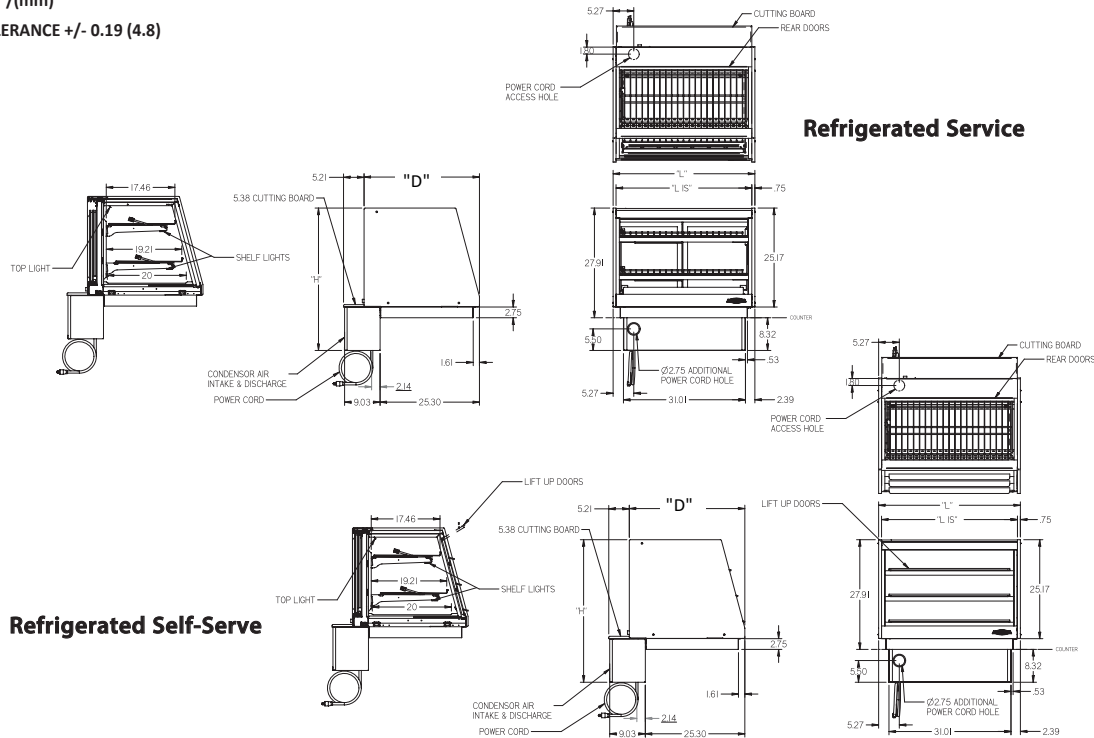

Refrigerated Service

Refrigerated Self-Serve

MODEL	DIMENSIONS				SHIPPING WHT		SELF-CONTAINED 120/60/1
	L	D	H	UNITS	LBS	KILO	
REFRIGERATED SERVICE REAR MOUNT							
ERR3628	36	29.7	27.83	in.	390	177	8.1 AMP
	914	754	707	mm.			
ERR4828	48	29.7	27.83	in.	450	204	8.3 AMP
	1219	754	707	mm.			
REFRIGERATED SELF-SERVE REAR MOUNT							
ERR3628SS	36	29.7	37.7	in.	430	195	8.1 AMP
	914	754	958	mm.			
ERR4828SS	48	29.7	37.7	in.	508	230	8.3 AMP
	1219	754	958	mm.			

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.

DOE 2017
Energy Efficiency
Compliant



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com