

#### **FEDERAL INDUSTRIES**

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234 Email: geninfo@federaling

Email: geninfo@federalind.com Website: www.federalind.com

		AIA#
Project Name:		
Item #:		
Model #:	Qty:	SIS#
Approval:		

## **ELEMENTS COUNTERTOP REFRIGERATED SERVICE & SELF-SERVE MERCHANDISERS**

## REFRIGERATED SERVICE REAR MOUNT

MODEL	<b>DIMENSIONS</b> (Includes End Panels)			
□ ERR3628	36 x 29.7 x 27.83 (in)			
	914 x 754 x 707 (mm)			
□ ERR4828	48 x 29.7 x 27.83 (in)			
	1219 x 754 x 707 (mm)			

# The Elements counter top merchandiser provides value without sacrificing performance.



# REFRIGERATED SELF-SERVE REAR MOUNT

MODEL	<b>DIMENSIONS</b> (Includes End Panels)
□ ERR3628SS	36 x 29.7 x 37.7 (in)
	914 x 754 x 958 (mm)
□ ERR4828SS	48 x 29.7 x 37.7 (in)
	1219 x 754 x 958 (mm)

### STANDARD FEATURES

#### **Model Features**

- Tempered thermopane front glass. Solid end panels.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Removable, scratch-resistant, rustproof black display deck
- Easily accessible light switch and adjustable temperature control
- Average case temperature
- Black trim
- Stainless steel mirrored interior end panels.
- Cord and plug (six foot)
- Installation without recessing into counter
- Set directly on counter with condensing component mounted on rear
- Self-serve models with lift-up front doors

#### Refrigeration

- Thermometer
- Condensate evaporator provided for a totally self-contained system
- Average case temperature of 38° (3.3°C) to 40° F (4.4°C)
- R290 Refrigerant

#### Shelving

• Black shelves are adjustable up and down and can also be tilted in two positions. Two tiers.

#### Lighting

- 3500k LED top light and shelf lights
- DLC Certified, IP66 rated

### **Agency Approvals**

- UL Safety and UL Sanitation Listed
- DOE 2017 Compliant



AIA#


### **ELEMENTS COUNTERTOP REFRIGERATED SERVICE & SELF-SERVE MERCHANDISERS**

SIS#

**Product Specifications** 

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

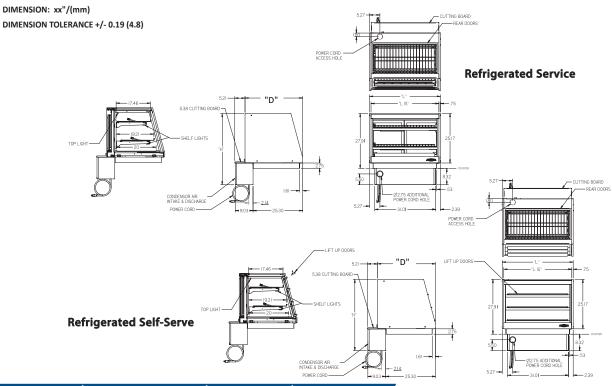

MODEL	DIMENSIONS		SHIPPING WHT		SELF-CONTAINED		
MODEL	L	D	н	UNITS	LBS	KILO	120/60/1
REFRIGERATED SERVICE REAR MOUNT							
EDD2C20	36	29.7	27.83	in.		477	8.1 AMP
ERR3628	914	754	707	mm.	390	177	
FRR4828	48	29.7	27.83	in.	450	204	8.3 AMP
ERR4828	1219	754	707	mm.			
REFRIGERATED SELF-SERVE REAR MOUNT							
36 29.7 37.7 in.	in.	420	195	0.1.4440			
ERR362855	ERR3628SS 914 754 958 mm. 430	195	8.1 AMP				
EDD 40 20CC	48 29.7 37.7 in.	230	230 8.3 AMP				
ERR4828SS	1219	754	958	mm.	508	230	o.s AIVIP

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.









Phone: 800-356-4206

Fax: 608-424-3234

215 Federal Avenue, Belleville, Wisconsin 53508-9201