

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: geninfo@federalind.com Website: www.federalind.com

Project Name:		AIA#
Item #:		
Model #: Qt	:y:	SIS#
Approval:		

ELEMENTS™ CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE MERCHANDISER

Display a variety of products and serve more customers with presentation and value in mind without sacrificing performance.



MODEL	DIMENSIONS (Includes End Panels)
□ ESSRC5052	50 x 34 x 52 (in)
	1270 x 864 x 1321 (mm)
□ ESSRC5952	59 x 34 x 52 (in)
	1499 x 864 x 1321 (mm)
□ ESSRC7752	77 x 34 x 52 (in)
	1956 x 864 x 1321 (mm)

STANDARD FEATURES

Refrigerated Self-Serve Bottom Display

- Steel base construction with black exterior
- Black interior
- Horizontal LED top light
- Two-tier black display step
- Thermometer
- Condensate evaporator provided for a self-contained system
- Easy clean, rustproof insulated evaporator coil compartment
- Easily accessible light switch and adjustable power switch
- Average case temperature of 38° to 40°F is maintained
- Rear access to the refrigeration system for quick and easy service
- Starting January 1, 2025, R449a refrigerant will be replaced by R290
- Adjustable leg levelers
- Cord and plug

Service Top Display

- Baffle system converts display from non-refrigerated to refrigerated
- Clear glass rear sliding doors
- Adjustable black wire shelf
- Shielded top and shelf light
- Thermometer

Shelving

• Adjustable black wire shelf

Lighting

- 3500K LED Horizontal top light and shelf light
- DLC Certified, IP66 rated

Agency Approvals

- UL Safety and UL Sanitation Listed
- DOE 2017 Compliant







AIA#

ELEMENTS™ CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE MERCHANDISER

SIS#


Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

- 1						
	Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C			
	All	Packaged Refrigerated Products	38°F / (3.3°C)			

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

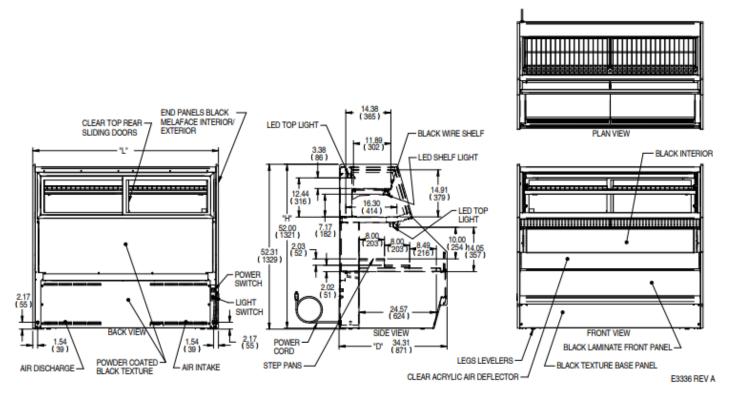

MODEL	DIMENSIONS			SHIPPING WHT		SELF-CONTAINED	NEMA Plug	
MODEL	L	D	Н1	UNITS	LBS	KILO	WITH CONDENSATE PAN	
ESSRC5052	50 34 52 in.	327	230/60/1 - 1/2 HP - 10 AMPS	IDS NEMA C 15 "				
E35RC3U32	1270	864	1321	mm.	720	327	230/60/1 - 1/2 HP - 10 AIMPS	NEMA 6-15 p
ECCDCEOES	RC5952 59 34 52 in. 1499 864 1321 mm.	34	52	in.	0.45	383	230/60/1 - 1/2 HP - 12 AMPS	NEMA 6-20 p
E22KC2A25			383	230/00/1 1/2 HF 12 AIVIF3	INEIVIA 6-20 β			
ESSRC7752	77	34	52	in.	1010	458	230/60/1 - 13/4 HP - 13 AMPS	NEMA 6-20 p
ESSRC//52	1956	864	1321	mm.				

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.









Email: Geninfo@Federalind.com **Website:** Federalind.com