



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville  
Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA #

SIS #

# Italian Glass Refrigerated Display Case

## Ideal for both Bakery & Deli Merchandising

Designed for customers looking for rich, up-scale Italian styling for maximum visual appeal that will drive product sales.



Model ITR4834-B18  
Shown with optional laminate

MODEL	DIMENSIONS (Includes End Panels)
<input type="checkbox"/> ITR3626-B18	36 x 30.75 x 44 (in) 914 x 781 x 1118 (mm)
<input type="checkbox"/> ITR4826-B18	48 x 30.75 x 44 (in) 1219 x 781 x 1118 (mm)
<input type="checkbox"/> ITR6026-B18	60 x 30.75 x 44 (in) 1524 x 781 x 1118 (mm)
<input type="checkbox"/> ITR3634-B18	36 x 30.75 x 52 (in) 914 x 781 x 1321 (mm)
<input type="checkbox"/> ITR4834-B18	48 x 30.75 x 52 (in) 1219 x 781 x 1321 (mm)
<input type="checkbox"/> ITR6034-B18	60 x 30.75 x 52 (in) 1524 x 781 x 1321 (mm)

## STANDARD FEATURES

### Model Features

- Powder coated steel base construction with a choice of six standard laminates
- Stainless steel interior
- All tempered thermo-pane glass construction
- Tilt out front glass for easy cleaning
- Removable sliding glass rear doors
- Adjustable Leg Levelers
- Rear air intake and discharge.

### Refrigeration

- Electronic temperature control with demand defrost
- PTC Condensate evaporator provided for a totally self-contained system.
- Condensate pump standard with remote cases
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- Starting January 1, 2025, R513A refrigerant will be replaced by R290

### Shelving

- Adjustable tempered glass shelves. Shelves are adjustable up and down and can be tilted in two positions (0°/5° angle) 34" (864mm) models have three tiers of shelves; 26" (660mm) models have two tiers of shelves

### Lighting

- 3500K LED top light and shelf lights
- DLC Certified, IP66 rated

### Agency Approvals

- UL, C-UL, and UL Sanitation Listed to NSF-7, Type II conditions
- DOE 2017 Compliant

## OPTIONAL ACCESSORIES

- Special Base Laminates
- Condensate Pump for self-contained cases
- Condensate pan for remote cases
- Cord & Plug (SC models only)
- Stainless Steel Shelving
- Reflective Ends
- 4"/102mm Casters
- Recessed Casters
- 6"/152mm Legs With or Without Skirt
- Rear Wrap board
- Remote Condensing Unit (EEV Included)
- Joining Kit for Continuous Line-Ups
- Reflective Rear Doors
- Front Air Intake & Discharge



**WARRANTY\***  
One year Parts and Labor  
2nd thru 5th year part only  
service compressor  
(U.S.A. and Canada)


Note: Information is subject to change at any time. Visit [www.federalind.com](http://www.federalind.com) For the most current specs.

AIA #	<h1>Italian Glass Refrigerated Display Case</h1>
SIS #	<b>Product Specifications</b>

Intended Environment: Type II - Designed to operate in maximum ambient conditions of 80°F (27°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended product to be displayed	Avg prod temp °F / °C
All	Unpackaged Refrigerated Products / All Foods & Beverages	38°F / (3.3°C)

DIMENSION: xx"/(mm)

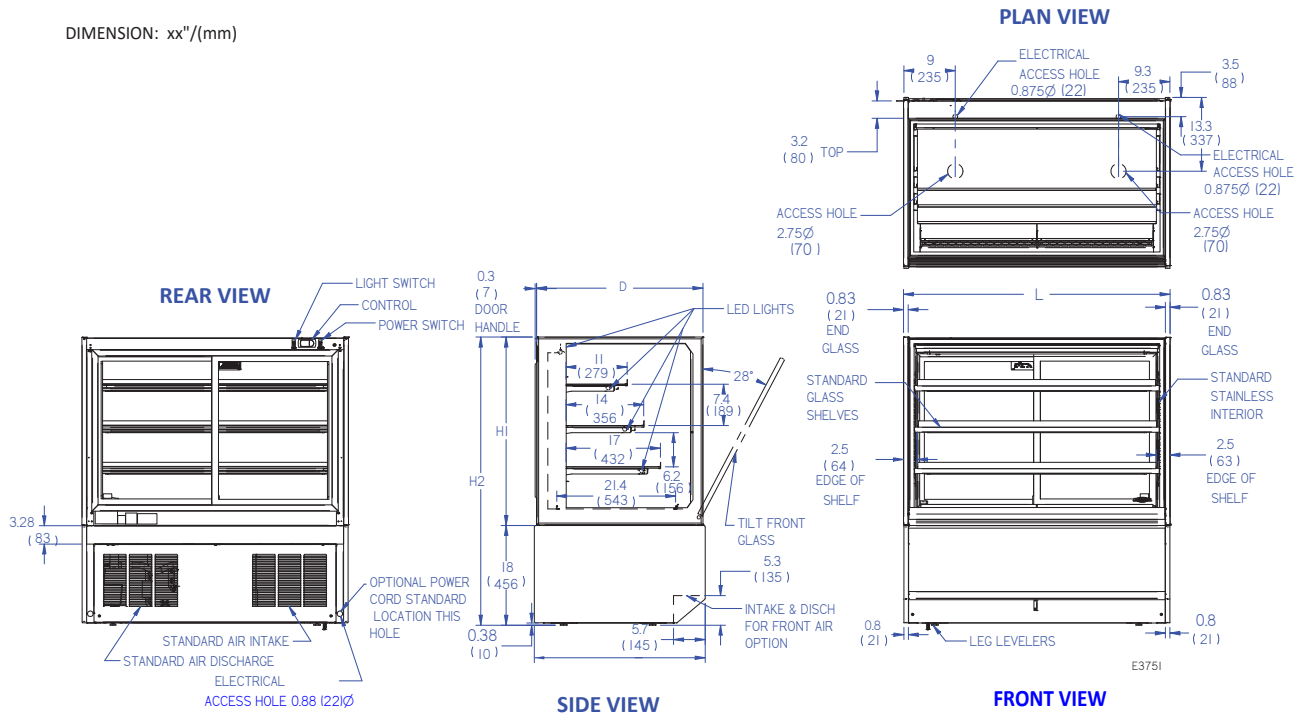

DIMENSION TOLERANCE +/- 0.19 (4.8)

MODEL	DIMENSIONS					SHIPPING WHT		SELF CONTAINED Permanently Connected		OPTIONAL NEMA PLUG	REMOTE		BTU @ 20°F
	L	D	H1	H2	UNITS	LBS	KILO	VOLTAGE	AMPS	CONFIG (SC)	VOLTAGE	AMPS	
ITR3626-B18	36	30.75	26	44	in.	625	284	120/60/1	MAX FUSE 20	NEMA 5-15P	120/60/1	MAX FUSE 15	3400
	914	781	661	1118	mm.								
ITR4826-B18	48	30.75	26	44	in.	680	309	120/60/1	MAX FUSE 20	NEMA 5-15P	120/60/1	MAX FUSE 15	3800
	1219	781	661	1118	mm.								
ITR6026-B18	60	30.75	26	44	in.	820	372	120/60/1	MAX FUSE 20	NEMA 5-15P	120/60/1	MAX FUSE 15	4200
	1524	781	661	1118	mm.								
ITR3634-B18	36	30.75	34	52	in.	610	277	120/60/1	MAX FUSE 20	NEMA 5-15P	120/60/1	MAX FUSE 15	3400
	914	781	864	1321	mm.								
ITR4834-B18	48	30.75	34	52	in.	800	363	120/60/1	MAX FUSE 20	NEMA 5-15P	120/60/1	MAX FUSE 15	3800
	1219	781	864	1321	mm.								
ITR6034-B18	60	30.75	34	52	in.	930	422	120/60/1	MAX FUSE 20	NEMA 5-15P	120/60/1	MAX FUSE 15	4200
	1524	781	864	1321	mm.								

- Refrigerated cases are designed to operate in a maximum of 80°F (27°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Packaged food products placed in case must be pre-chilled before placing in case.



**FEDERAL INDUSTRIES**  
 A Standex Company  
 215 Federal Avenue, Belleville, Wisconsin 53508-9201

**Phone:** 800-356-4206  
**Fax:** 608-424-3234  
**Email:** Geninfo@Federalind.com  
**Website:** Federalind.com