



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville
Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

Italian Glass Refrigerated Counter 26" H Display Case (Drop-In)

Ideal for both Bakery & Deli Merchandising

Designed for customers looking for rich, up-scale Italian styling for maximum visual appeal that will drive product sales.



Model ITR4826 Shown
*Counter Not Provided

OPTIONAL ACCESSORIES

- | | |
|---|--|
| ☐ Stainless Steel Shelving | ☐ Joining Kit for Continuous Line-ups |
| ☐ Glass 17" Shelving | ☐ Remote Condenser (EEV Included)
(R449a in Remote Applications) |
| ☐ Stainless Steel 17" Shelving | ☐ Horizontal Dual Zone (Refrigerated/
Dry) |
| ☐ Condensate Pump | ☐ Refrigeration Control with Fan Off
Selection |
| ☐ Cord & Plug (SC Models Only) | ☐ Stainless Steel Exterior |
| ☐ Reflective Rear Doors | ☐ Front Air Intake and Discharge |
| ☐ Reflective End Panels | |
| ☐ Mirrored End Panels | |

*Additional options available on the website and price list.

MODEL	DIMENSIONS (Includes End Panels)
☐ ITR3626	36 x 30 x 26 (in) 914 x 762 x 660 (mm)
☐ ITR4826	48 x 30 x 26 (in) 1219 x 762 x 660 (mm)
☐ ITR6026	60 x 30 x 26 (in) 1524 x 762 x 660 (mm)

STANDARD FEATURES

Model Features

- Stainless steel interior
- All tempered thermo-pane glass construction
- Removable sliding glass rear doors
- Rear air intake and discharge
- Front glass and rear door locks

Refrigeration

- Electronic temperature control with on demand defrost
- PTC Condensate evaporator provided for a totally self-contained system
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- Proper ventilation of counter is required for proper performance
- Rear air intake and discharge
- R290 Refrigerant

Shelving


- Adjustable tempered glass shelves. Shelves are adjustable up and down and can be tilted in two positions (0°/ 5 angle).
- Two tiers of shelves

Lighting

- 3500K LED top light and shelf lights

Agency Approvals

- DLC Certified, IP66 rated
- UL, C-UL, and UL Sanitation Listed to NSF-7, Type I conditions
- DOE 2017 Compliant



Note: Information is subject to change at any time. Visit www.federalind.com For the most current specs.


AIA #
SIS #

Italian Glass Refrigerated Counter 26" H Display Case (Drop-In)

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75° F (24° C) and 55% humidity.		
Zone	Intended product to be displayed	Avg prod temp °F / °C
All	Packaged refrigerated products	38° F / (3.3° C)

DIMENSION: xx"/(mm)

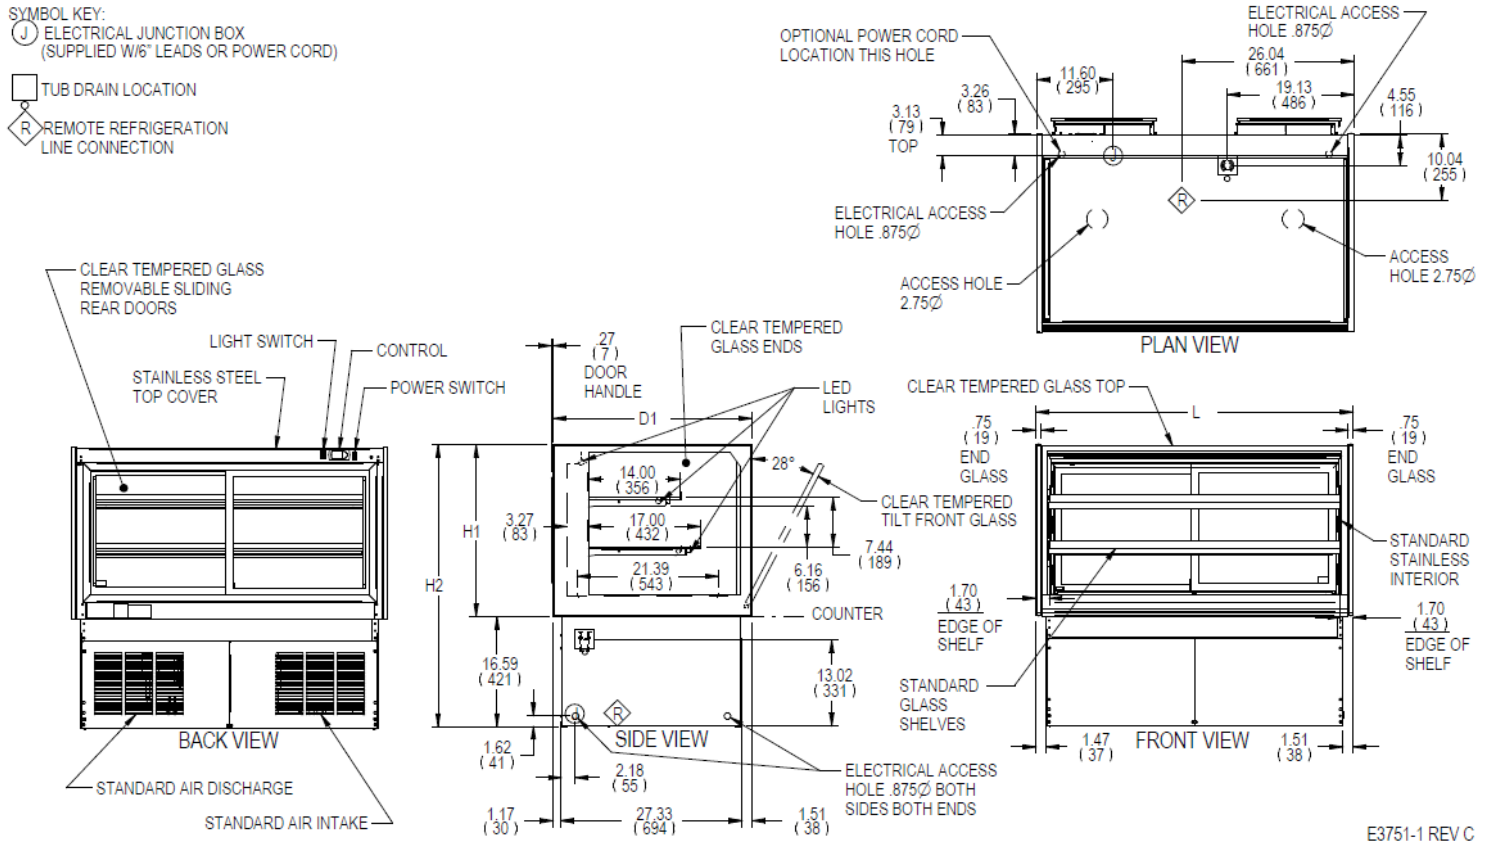

MODEL	DIMENSION					COUNTER CUT OUT		SHELVING				DISPLAY AREA SQ IN	INTERIOR VOLUME CU FT	SELF CONTAINED							REMOTE					
	L	D1	D2	H1	H2	L	D	# OF TIERS	DT	DB	L			PERMANENT CONNECT		OPTIONAL NEMA CORD & PLUG	REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	PERMANENT CONNECT		REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT		
	in	in	in	in	in	in	in		in	in	in			2-WIRE + GROUND	2-WIRE + GROUND					2-WIRE + GROUND	2-WIRE + GROUND					
	mm	mm	mm	mm	mm	mm	mm		mm	mm	mm			120/60/1	2-WIRE + GROUND					120/60/1	LBS				120/60/1	LBS
	mm	mm	mm	mm	mm	mm	mm		mm	mm	mm			AMPS	MAX FUSE SIZE					KILO	AMPS				MAX FUSE SIZE	KILO
ITR3626	36.00	30.00	27.30	26.00	42.70	33.40	27.70	2	14	17	30.88	1630 SQ	11.4 CU	12.4	20	NEMA 5-20P	R290	CONDENSATE	537 LBS	3.0	15	R449a	CONDENSATE	500 LBS		
	914	762	693	660	1085	848	704		356	432	784	IN	FT					PAN	244 KILO				PUMP	227 KILO		
ITR4826	48.00	30.00	27.30	26.00	42.70	45.40	27.70	2	14	17	42.88	2240 SQ	15.4 CU	12.4	20	NEMA 5-20P	R290	CONDENSATE	720 LBS	3.0	15	R449a	CONDENSATE	670 LBS		
	1219	762	693	660	1085	1153	704		356	432	1089	IN	FT					PAN	327 KILO				PUMP	304 KILO		
ITR6026	60.00	30.00	27.30	26.00	42.70	57.40	27.70	2	14	17	54.88	2850 SQ	19.0 CU	12.4	20	NEMA 5-20P	R290	CONDENSATE	800 LBS	3.3	15	R449a	CONDENSATE	750 LBS		
	1524	762	693	660	1085	1458	704		356	432	1394	IN	FT					PAN	363 KILO				PUMP	420 KILO		

- Refrigerated cases are designed to operate in a maximum of 80°F (27°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Counter must have adequate ventilation for proper case performance.



FEDERAL INDUSTRIES
 A Standex Company
 215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: Geninfo@Federalind.com
Website: Federalind.com