



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville
Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

Italian Glass Refrigerated Self-Serve 44"H Display Case

Designed for customers looking for a rich, up-scale Italian styling for maximum visual appeal that will drive product sales.



Model ITRSS4834-B18
Shown with optional laminate

OPTIONAL ACCESSORIES

- ☐ Premium Base Laminates
- ☐ Stainless Steel Exterior
- ☐ Condensate Pump (SC Models Only)
- ☐ Condensate Pan (Remote Models)
- ☐ Cord & Plug (SC Models Only)
- ☐ Stainless Steel Shelving
- ☐ Reflective End Glass
- ☐ Reflective Glass Rear Sliding Door
- ☐ Front Air Intake & Discharge
- ☐ 4" Casters with Skirt
- ☐ 2.5" Casters
- ☐ 2.5" Recessed Casters
- ☐ 6" Legs with or without skirt
- ☐ Seismic Legs
- ☐ Rear Wrap Board (White)
- ☐ Remote Condensing Unit (R449a Refrigerant, EEV Included)
- ☐ Joining Kit for Continuous Line Ups

MODEL

DIMENSIONS

(Includes End Panels)

<input type="checkbox"/> ITRSS3626-B18	36 x 33 x 44 (in) 914 x 838 x 1118 (mm)
<input type="checkbox"/> ITRSS4826-B18	48 x 33 x 44 (in) 1219 x 838 x 1118 (mm)
<input type="checkbox"/> ITRSS6026-B18	60 x 33 x 44 (in) 1524 x 838 x 1118 (mm)

STANDARD FEATURES

Model Features

- Powder coated steel base construction with a choice of standard laminates
- Stainless steel interior
- All tempered thermo-pane glass construction
- Removable tempered sliding glass rear doors
- Adjustable Leg Levelers
- Rear air intake and discharge
- Energy Saving Night Curtain

Refrigeration

- Electronic temperature control with on demand defrost
- PTC Condensate evaporator provided for a totally self-contained system
- Condensate pump standard on remote cases
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- Starting January 1, 2025, R513A refrigerant will be replaced by R290
- Adjustable tempered glass shelves. Shelves are adjustable up and down and can be tilted in two positions (0°/5° angle). 26" (660 models have two tiers of shelves).

Lighting

- 3500K LED top light and shelf lights
- DLC Certified, IP66 rated

Agency Approvals

- UL, C-UL, and UL Sanitation Listed to NSF-7, Type I conditions
- DOE 2017 Compliant



WARRANTY*
One year Parts and Labor
2nd thru 5th year part only
service compressor
(U.S.A. and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com For the most current specs.

AIA #

Italian Glass Refrigerated Self-Serve 44"H Display Case

SIS #

Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended product to be displayed	Avg prod temp °F / °C
All	Packaged refrigerated products	38°F / (3.3°C)


DIMENSION: xx"/(mm)

SYMBOL KEY:

Ⓝ ELECTRICAL JUNCTION BOX
(SUPPLIED W/6" LEADS OR POWER CORD)

□ TUB DRAIN LOCATION

Ⓡ REMOTE REFRIGERATION
LINE CONNECTION

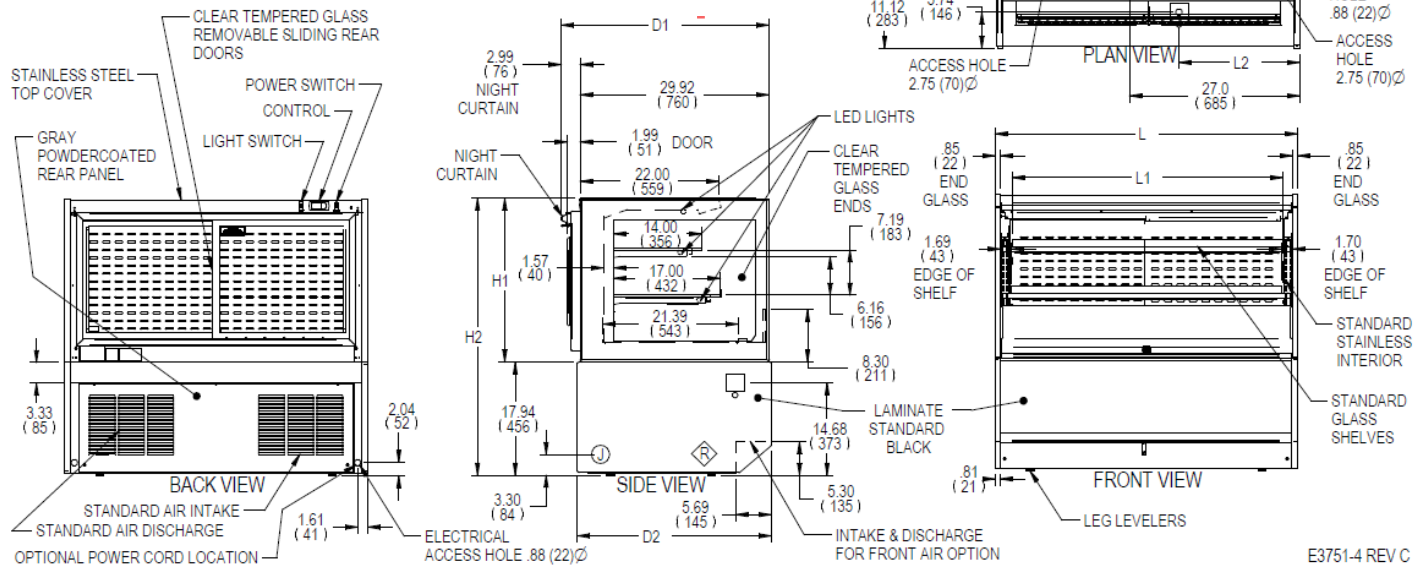

E3751-4 REV C

DIMENSION TOLERANCE +/- 0.19 (4.8)

MODEL	DIMENSION						TUB DRAIN	SHELVING			DISPLAY AREA SQ IN	INTERIOR VOLUME CU FT	PERMANENT CONNECT 2-WIRE + GROUND				OPTIONAL NEMA CORD & PLUG 2-WIRE + GROUND			SELF CONTAINED			REMOTE		
	L	D1	D2	H1	H2	L2		# OF TIERS	DT	DB	L1														
	in	in	in	in	in	in			in	in	in														
ITRSS3626-B18	36.00	33.00	30.75	26.00	44.00	17.63		2	14	17	30.88	1630 SQ	11.4 CU	120/60/1	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	625 LBS	3.3	15	R449a	CONDENSATE PUMP	590 LBS
ITRSS4826-B18	48.00	33.00	30.75	26.00	44.00	19.13		2	14	17	42.88	2240 SQ	15.4 CU	120/60/1	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	680 LBS	3.3	15	R449a	CONDENSATE PUMP	630 LBS
ITRSS6026-B18	60.00	33.00	30.75	26.00	44.00	19.13		2	14	17	54.88	2850 SQ	19.0 CU	230/60/1	9.2	15	NEMA 6-15P	R290	CONDENSATE PAN	820 LBS	3.3	15	R449a	CONDENSATE PUMP	760 LBS
	1524	838	781	660	1118	486			356	432	1394														

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Package food products placed in case must be pre-chilled to 40°F (4.4°C) degrees before placing in case.



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com