



*The Signature of Quality*

### FEDERAL INDUSTRIES

A Standex Company  
215 Federal Avenue  
Belleville, WI 53508-9201

Phone: 800-356-4206  
Fax: 608-424-3234  
Email: geninfo@federalind.com  
Website: www.federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA#

SIS#

## MARKET SERIES SELF-SERVE REFRIGERATED BAKERY CASE

**Market Bakery. The low profile merchandiser that provides solutions to your merchandising needs. Designed for continuous case line-ups.**



Panel base shown.

| MODEL                            | DIMENSIONS<br>( Includes End Panels )              |
|----------------------------------|--|
| <input type="checkbox"/> SQ3CBSS | 36 x 44-1/8 x 32.25 (in)<br>914 x 1121 x 819 (mm)  |
| <input type="checkbox"/> SQ4CBSS | 48 x 44-1/8 x 32.25 (in)<br>1219 x 1121 x 819 (mm) |
| <input type="checkbox"/> SQ5CBSS | 60 x 44-1/8 x 32.25 (in)<br>1524 x 1121 x 819 (mm) |
| <input type="checkbox"/> SQ6CBSS | 72 x 44-1/8 x 32.25 (in)<br>1829 x 1121 x 819 (mm) |
| <input type="checkbox"/> SQ8CBSS | 96 x 44-1/8 x 32.25 (in)<br>2438 x 1121 x 819 (mm) |

### STANDARD FEATURES

#### Model Features

- Adjustable Leg Levelers
- Rear work counter.
- Pedestal or panel base design.
- Stainless steel interior and exterior finish.
- Solid-state control panel with main power, light, and temperature readout.
- Designed for continuous case line-ups.
- Full length, two step deck display risers.
- Energy-saving night curtain.

#### Lighting

- 3500K LED Case Light
- DLC Certified, IP66 rated

#### Refrigeration

- Condensate Pump Provided
- Average case temperature of 38° to 40°F is maintained in the bottom display area
- Thermometer
- R513a Refrigerant (R449a in Remote Applications)

#### Agency Approvals

- UL Safety and UL Sanitation listed
- DOE 2017 Compliant

### OPTIONAL ACCESSORIES

- Special Case Height (34" or 38")
- Front Bumper Rail (Black, White, Green, Gray)
- Decorative End Panel (Black, White, Green, Gray)
- Remote Refrigeration (R449a Refrigerant, EEV Included)
- Accent Base LED Light
- Condensate Evaporator Assembly



**WARRANTY\***  
One year Parts and Labor  
2nd thru 5th year part  
only service compressor  
(U.S.A and Canada)

Note: Information is subject to change at any time.  
Visit [www.federalind.com](http://www.federalind.com) for the most current specs.

Revised 02/18/2020

AIA#

# MARKET SERIES SELF-SERVE REFRIGERATED BAKERY CASE

SIS#


## Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

| Zone | Intended Product To Be Displayed | Avg Prod Temp °F/°C |
|------|----------------------------------|---------------------|
| All  | Packaged Refrigerated Products   | 38°F / (3.3°C)      |

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)

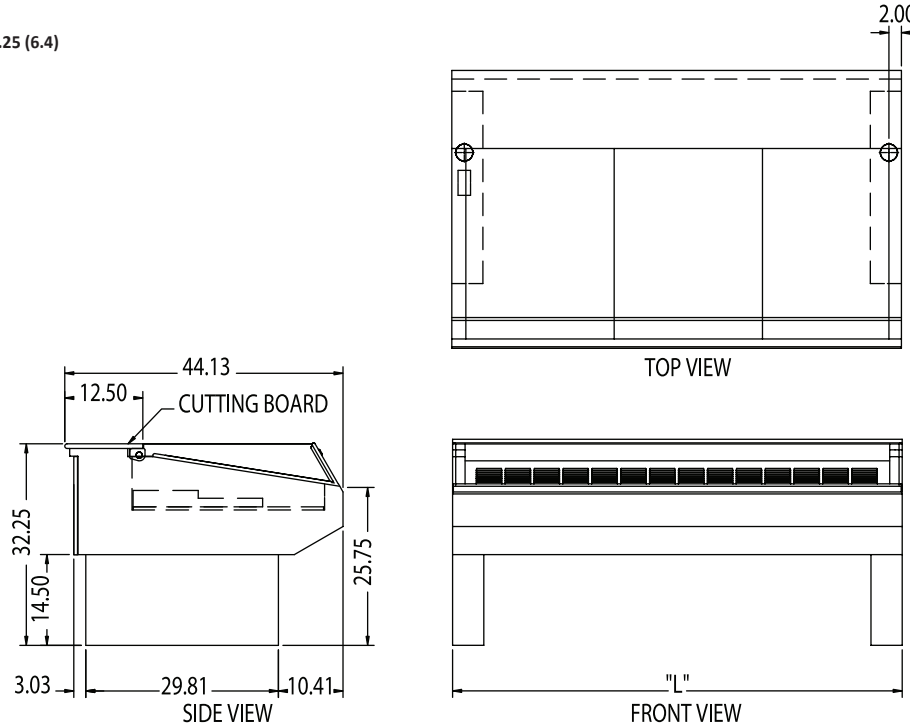

| MODEL   | * DIMENSIONS |        |       |       | SHIPPING WHT |      | **SELF CONTAINED<br>120/60/1 | ** REMOTE<br>120/60/1 |
|---------|--------------|--------|-------|-------|--------------|------|------------------------------|-----------------------|
|         | L            | D      | H1    | UNITS | LBS          | KILO |                              |                       |
| SQ3CBSS | 36           | 44.125 | 32.25 | in.   | 675          | 306  | 1/2 HP - 11.5 AMPS           | 6 AMPS                |
|         | 1226         | 1121   | 819   | mm.   |              |      |                              |                       |
| SQ4CBSS | 48           | 44.125 | 32.25 | in.   | 745          | 338  | 1/2 HP - 13.8 AMPS           | 7 AMPS                |
|         | 1219         | 1121   | 819   | mm.   |              |      |                              |                       |
| SQ5CBSS | 60           | 44.125 | 32.25 | in.   | 895          | 406  | 1/2 HP - 13.8 AMPS           | 7 AMPS                |
|         | 1524         | 1121   | 819   | mm.   |              |      |                              |                       |
| SQ6CBSS | 72           | 44.125 | 32.25 | in.   | 1035         | 469  | 1/2 HP - 14.8 AMPS           | 7 AMPS                |
|         | 1829         | 1121   | 819   | mm.   |              |      |                              |                       |
| SQ8CBSS | 96           | 44.125 | 32.25 | in.   | 1135         | 515  | 3/4 HP - 16.0 AMPS           | 8 AMPS                |
|         | 2438         | 1121   | 819   | mm.   |              |      |                              |                       |

\* Without decorative end panels

\*\* Plus general receptacle 120V, 15 AMP. (2nd circuit required.)

- When ordering, specify case line-up and pedestal or panel design
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality®

**FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com