

### **FEDERAL INDUSTRIES**

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: geninfo@federalind.com Website: www.federalind.com

Project Name:		
Item #:		
Model #: Qty:	SIS#	
Approval:		

# **HYBRID MERCHANDISER - Ambient Service Over Refrigerated Self-Serve**

Display more product and serve more customers with presentation and value in mind.



CD4828SS/RSS4SC Shown

DIMENSIONS						
( Includes End Panels )						
36.25x 39 x 69.75 (in)						
921 x 991 x 1772 (mm)						
48 x 39 x 69.75 (in)						
1219 x 991 x 1772 (mm)						

## STANDARD FEATURES

# **Refrigerated Self-Serve Bottom Display**

- Black laminated exterior. Other finishes available.
- Black trim. Silver optional.
- Black interior, glass ends.
- Horizontal LED top and front light.
- Two tiers black metal shelves.
- Electronic temperature control maintains 38° to 40 case temperature. Note: Case temperature will vary if the air curtain is disrupted.
- Cord and plug.
- Condensate evaporator (separate circuit required on model RSS6SC)
- R290 Refrigerant

### **Ambient Service Top Display**

- Two tiers black wire shelves.
- Sliding rear doors.
- Black trim.

### Lighting

• LED top light and shelf lights.

### **Agency Approvals**

- UL Safety and UL Sanitation Listed to NSF Type II conditions.
- DOE 2017 Compliant

# **OPTIONAL ACCESSORIES**

# **For Top Display**

- ☐ Glass Shelves
- ☐ Reflective Ends
- □ Reflective Rear Doors

# For Self-Serve Refrigerated Base

- ☐ Energy Saving Night Curtain
- $\hfill\Box$  Silver Trim
- ☐ Special Base Finish
- ☐ Mirrored Interior Ends
- ☐ Security Night Cover
- ☐ Stainless Steel Steps in Lieu of Metal Shelves
- ☐ Reflective End Glass












# HYBRID MERCHANDISER - Ambient Service Over Refrigerated Self-Serve Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone Intended Product To Be Displayed Avg Prod Temp °F/°C

All Packaged Refrigerated Products 38°F / (3.3°C)

DIMENSION: xx"/(mm) DIMENSION TOLERANCE +/- 0.19 (4.8)

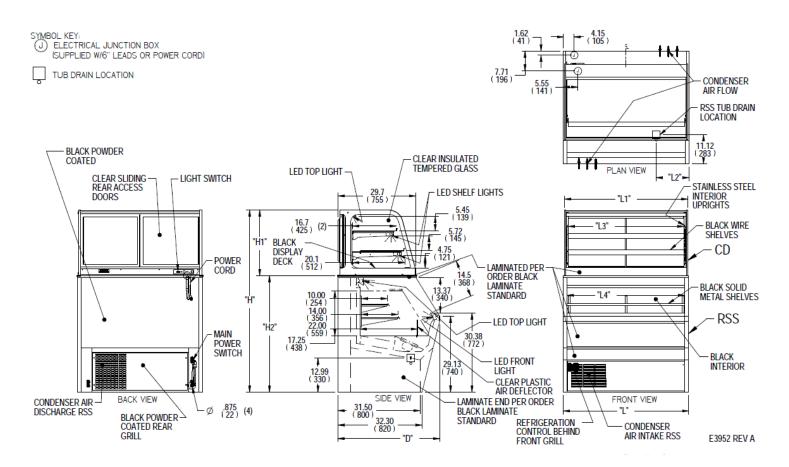

													SELF CONTAINED							
	HYE	BRID IN	O	INDIVIDU											JAL CASE INFO					
MODEL	DIMENSION			INDIVIDUAL	DIMENSION		ION	TUB DRAIN	SH	ELVING		INTERIOR			ELECTRICAL			SHIP		
	L	D	Н	CASE	CASE	L1	H1	H2	L2	# OF	L3	L4	VOLUME	2-WIRF + GROUND 120/60/1		REFRIGERANT	CONDENSATE	WEIGHT		
WODEL	in	in	in	LOCATION	CASE	in	in	in	in	TIERS	in	in		AMPS	MAX	CONNECTION TYPE	REFRIGERANT	REMOVAL	LBS	
	mm	mm	mm		QTY	Y mm	mm	mm	mm		mm	mm	COFI	F	<b>FUSE SIZE</b>				KILO	
CD3628/RSS3SC	26.25	30 00	00 69.75	ТОР	CD3628	35.0	25.1			2	32.7		10.50	1.5	15	NEMA 5-15P CORD & PLUG			847 LBS	
	30.23	33.00			1	889	889 638				831		10.50	1.5	13	NEIWA 3-13F CORD & FLOG			047 LD3	
	921	991	1772	воттом	RSS3SC			44.63	12.50			33.3	7.18	10.4	20	NEMA 5-20P CORD & PLUG	R290	CONDENSATE	384 KILO	
	921	991	1//2		1		1	1133	317.50	2		845	7.10	10.4	20	NEIWA 3-20F CORD & FLOG	N290	PAN	364 KILO	
CD4828/RSS4SC	49.00	20 00	69.75	TOP	CD4828	47.0	17.0 25.1			2	44.7		14.00 1	1.5	15	NEMA 5-15P CORD & PLUG			1010 LBS	
	40.00	39.00			1	1194	638				1135		14.00	0 1.5	15				1010 LB3	
	1219	991	1772	воттом	RSS4SC		44	44.63	12.50	2		45.0	9.72	12	20	NEMA 5-20P CORD & PLUG	R290	CONDENSATE	458 KILO	
	1219	331	1//2	BOTTOW	1			1133	317.50			1143	5.72	12	20	INCINIA 3-20F CORD & PLOG	N290	PAN	436 KILU	

- \* On the RSS6SC a separate 120/60/1 15 AMP circuit is required for the condensate evaporator.
- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI recepticle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.a











**Phone:** 800-356-4206 **Fax:** 608-424-3234

**Email:** Geninfo@Federalind.com **Website:** Federalind.com