



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, WI 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: geninfo@federalind.com

Website: www.federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA#

SIS#

HYBRID MERCHANDISER

SERVICE REFRIGERATED OVER SELF-SERVE REFRIGERATED

Display more product and serve more customers with presentation and value in mind.



MODEL

DIMENSIONS

(Includes End Panels)

☐ CRR3628/RSS3SC	36.25 x 43.25 x 72.50 (in) 921 x 1099 x 1842 (mm)
☐ CRR4828/RSS4SC	48 x 43.25 x 72.50(in) 1219 x 1099 x 1842 (mm)

STANDARD FEATURES

Service Refrigerated Top Display

- Service Refrigerated Top Display
- Two tiers black wire shelves.
- Sliding rear doors.
- Black trim.
- Thermometer
- R290 Refrigerant

Refrigerated Self-Serve Bottom Display

- Black laminated exterior. Other finishes available.
- Black trim. Silver optional.
- Black interior, glass ends.
- Horizontal LED top and front light.
- Two tiers black metal shelves.
- Cord and plug.
- Thermometer
- R290 Refrigerant

Lighting

- LED top light and shelf lights.

Agency Approvals

- UL Safety and UL Sanitation Listed to NSF Type I conditions
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

For Top Display

- ☐ Glass Shelves
- ☐ Reflective Ends
- ☐ Reflective Rear Doors

For Self-Serve Refrigerated Base

- ☐ Energy Saving Night Curtain
- ☐ Silver Trim
- ☐ Special Base Finish
- ☐ Mirrored Interior Ends
- ☐ Security Night Cover
- ☐ Stainless Steel Steps in Lieu of Metal Shelves
- ☐ Reflective End Glass



WARRANTY*
One year Parts and Labor
2nd thru 5th year part
only service compressor
(U.S.A and Canada)

Note: Information is subject to change at any time.
Visit www.federalind.com for the most current specs.

Revised 8/1/2025

AIA#

HYBRID MERCHANDISER

SIS#

Product Specifications


Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

SYMBOL KEY:

Ⓜ ELECTRICAL JUNCTION BOX
SUPPLIED W/6" LEADS OR POWER CORD)

□ TUB DRAIN LOCATION

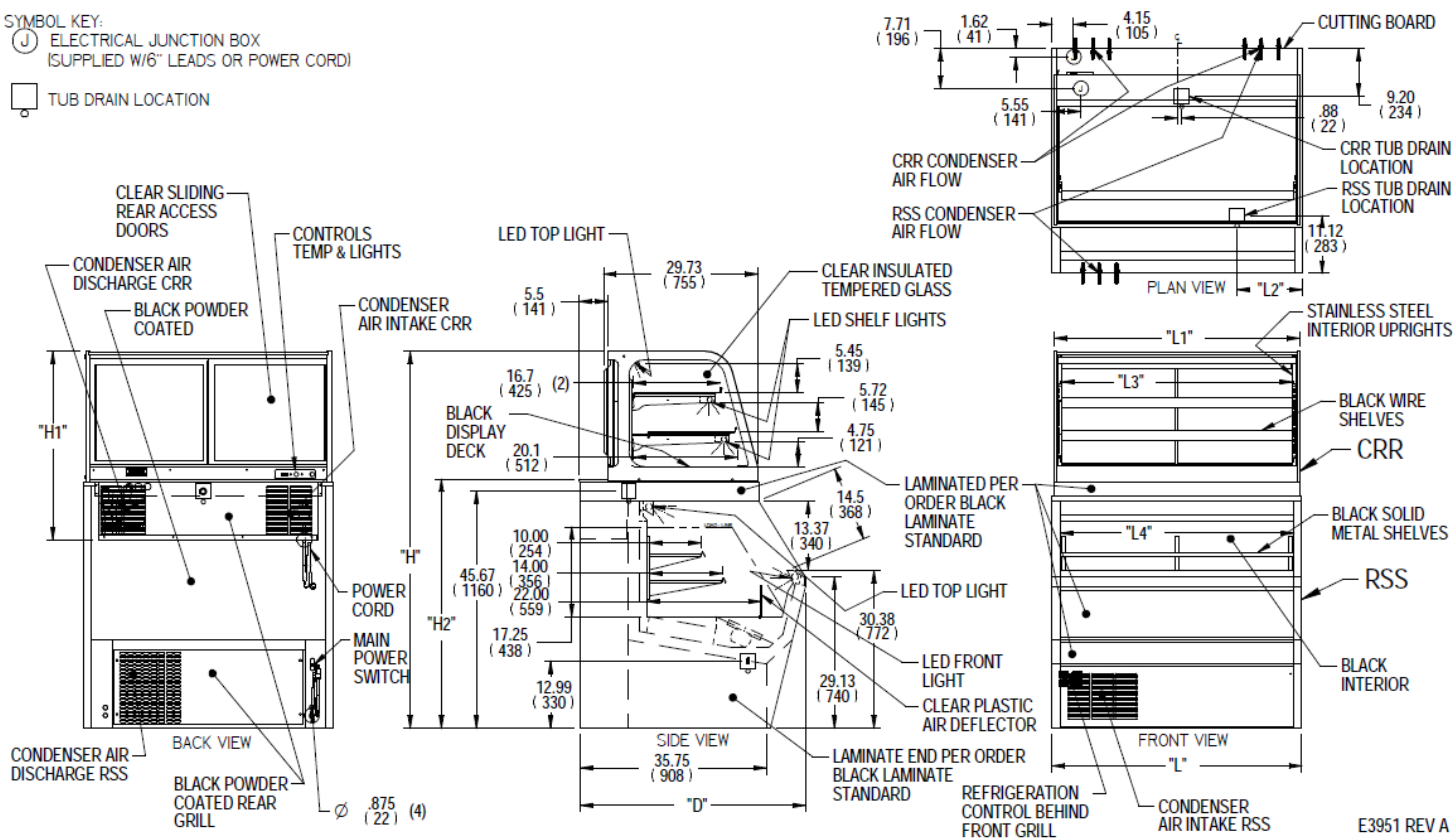

E3951 REV A

														SELF CONTAINED						
		HYBRID INFO			INDIVIDUAL CASE INFO															
MODEL	DIMENSION			CASE LOCATION	INDIVIDUAL CASE	DIMENSION			TUB DRAIN		SHELVING		INTERIOR VOLUME CU FT	ELECTRICAL			REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	
	L	D	H			L1	H1	H2	L2	# OF TIERS	L3	L4		2-WIRE + GROUND 120/60/1						
	in	in	in			in	in	in	in		in	AMPS		MAX FUSE SIZE	CONNECTION TYPE					
	mm	mm	mm			mm	mm	mm	mm		mm									
	QTY	mm	mm			mm	mm	mm	mm											
CRR3628/RSS3SC	36.25	43.25	72.50	TOP	CRR3628 1	36.0 914	36.2 919			2	32.2 818		9.25	6	15	NEMA 5-15P CORD & PLUG	R290	CONDENSATE PAN	847 LBS	
	921	1099	1842	BOTTOM	RSS3SC 1			47.91 1217	12.5 318	2		33.3 845	7.18	10.4	20	NEMA 5-20P CORD & PLUG	R290	CONDENSATE PAN	384 KILG	
CRR4828/RSS4SC	48.00	43.25	72.50	TOP	CRR4828 1	48.0 1219	36.2 919			2	44.2 1123		12.50	6	15	NEMA 5-15P CORD & PLUG	R290	CONDENSATE PAN	1010 LBS	
	1219	1099	1842	BOTTOM	RSS4SC 1			47.91 1217	12.5 318	2		45.0 1143	9.72	12	20	NEMA 5-20P CORD & PLUG	R290	CONDENSATE PAN	458 KILG	

- On the six foot display a separate 120/60/1 15 AMP circuit is required for the condensate evaporator.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com