



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, WI 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: geninfo@federalind.com

Website: www.federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA#

SIS#

Convertible Service Over Refrigerated Self-Serve Display Case

Display a variety of products and serve more customers with pre-sentation and value in mind.



Model SSRC5052 Shown

MODEL	DIMENSIONS (Includes End Panels)
☐ SSRC3652	36 x 34.3 x 52.5 (in) 914 x 871 x 1334 (mm)
☐ SSRC5052	50 x 34 x 52.5 (in) 1270 x 871 x 1334 (mm)
☐ SSRC5952	59 x 34.3 x 52.5 (in) 1499 x 871 x 1334 (mm)
☐ SSRC7752	77 x 34.3 x 52.5 (in) 1956 x 871 x 1334 (mm)

STANDARD FEATURES

Convertible Service Top Display

- Divided merchandising area (24" and 36" models have one display area only)
- Clear glass rear sliding doors (24" model has hinged door)
- Tempered lift-up thermopane front glass

Refrigerated Self-Serve Bottom Display

- Steel base construction with black exterior
- Black interior, glass end panels
- Two-tier black display step
- Easily accessible light switch and adjustable power switch located at case rear
- Rear access to refrigeration system for quick and easy service
- Adjustable leg levelers

Refrigeration

- Condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40° F case temperature.
- Easy clean, rustproof insulated evaporator coil compartment
- Insulated with high-density urethane foam
- R290 Refrigerant
- Thermometer
- Baffle system converts display from non-refrigerated to refrigerated (Service Top Display)

Shelving

- Adjustable black wire shelf

Lighting

- 3500K LED top and shelf light
- DLC Certified, IP66 rated

Agency Approvals

- UL and UL Sanitation listed
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

For Service Top Display

- ☐ Reflective Rear Doors
- ☐ Glass Shelves

For Self-Service Refrigerated Base

- ☐ Reflective End Glass
- ☐ Special Finish
- ☐ Energy Saving Night Curtain
- ☐ Security Night Cover
- ☐ Solid Rear Sliding Access Doors for Bottom Section
- ☐ Cord & Plug
- ☐ Remote Refrigeration (R449a Refrigerant, EEV Included)
- ☐ Casters (Recessed or 4") or 6" Legs
- ☐ Black Wire or Glass Shelf with Light in Lieu of Display Steps
- ☐ Rear Wrapping Board



WARRANTY*
One year Parts and Labor
2nd thru 5th year part
only service compressor
(U.S.A and Canada)



Note: Information is subject to change at any time.
Visit www.federalind.com for the most current specs.

Revised 7/24/2025

CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE SPECIALTY MERCHANDISER

SIS#

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSIONS: xx"/(mm)


DIMENSION TOLERANCE +/- .19 (4.8)

SYMBOL KEY:

J ELECTRICAL JUNCTION BOX
(SUPPLIED W/6" LEADS OR POWER CORD)

☐ TUB DRAIN LOCATION

R REMOTE REFRIGERATION
LINE CONNECTION

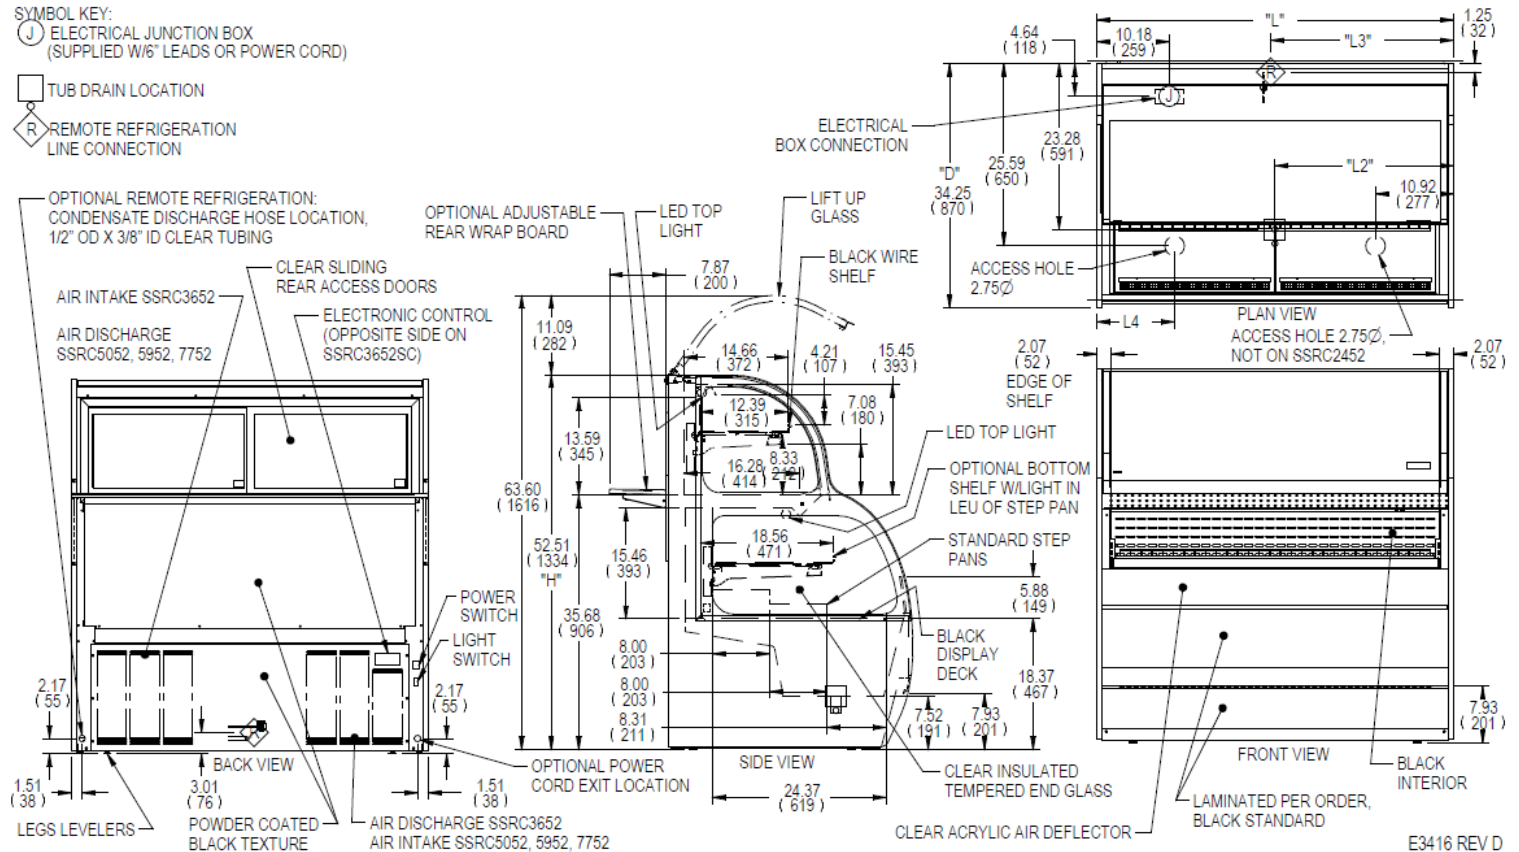

MODEL	DIMENSION						TUB DRAIN	SHELVING		TOP INTERIOR VOLUME CU FT	BOTTOM INTERIOR VOLUME CU FT	SELF CONTAINED				REMOTE												
	L	D	H	L3	L4	L2		# OF TIERS	D			L1	PERMANENT CONNECT		OPTIONAL NEMA CORD & PLUG	REFRIGERANT	SHIP WEIGHT	PERMANENT CONNECT		REFRIGERANT	BTU'S @+20°	CONDENSATE REMOVAL	SHIP WEIGHT					
	in	in	in	in	in	in			in			in	2-WIRE + GROUND					2-WIRE + GROUND										
	mm	mm	mm	mm	mm	mm			mm			mm	ELECTRICAL	AMPS				MAX FUSE SIZE	2-WIRE + GROUND					LBS	AMPS	MAX FUSE SIZE		
	mm	mm	mm	mm	mm	mm			mm			mm												KILO	AMPS	MAX FUSE SIZE	KILO	
SSRC365	36.00	34.30	52.50	20.92	10.92	5.26	1	12.4	31.75	5.10	8.40	120/60/1	12.7	20	NEMA 5-20	R290	590 LBS	8.5	15	R449a	4,400	CONDENSATE PUMP	530 LBS					
	914	871	1334	531	277	134		315	806																	268 KILLO		240 KILLO
SSRC5052	50.00	34.30	52.50	25.60	10.92	25.00	1	12.4	45.75	7.10	11.80	208-240/60/1	7.0	15	NEMA 6-15	R290	720 LBS	10.0	15	R449a	5,400	CONDENSATE PUMP	660 LBS					
	1270	871	1334	650	277	635		315	1162																	327 KILLO		299 KILLO
SSRC5952	59.00	34.30	52.50	26.70	10.92	29.47	1	12.4	54.75	8.50	14.00	208-240/60/1	7.5	15	NEMA 6-15	R290	845 LBS	13.0	15	R449a	6,400	CONDENSATE PUMP	770 LBS					
	1499	871	1334	678	277	749		315	1391																	383 KILLO		349 KILLO
SSRC7752	77.00	34.30	52.50	26.70	10.92	38.47	1	12.4	72.75	11.20	18.30	208-240/60/1	7.5	15	NEMA 6-15	R290	1010 LBS	13.0	15	R449a	7,400	CONDENSATE PUMP	935 LBS					
	1956	871	1334	678	277	977		315	1848																	458 KILLO		424 KILLO

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- IF GFCI is required, a GFI Breaker must be used in lieu of GFCI recepticle.



The Signature of Quality.

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com