

**FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue
Belleville, WI 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: geninfo@federalind.comWebsite: www.federalind.com*The Signature of Quality*

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA#

SIS#

CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE SPECIALTY MERCHANDISER

Display a variety of products and serve more customers with pre-sentation and value in mind.



Model SSRC5052 Shown

MODEL	DIMENSIONS (Includes End Panels)
☐ SSRC3652	36 x 34.3 x 52.5 (in) 914 x 871 x 1334 (mm)
☐ SSRC5052	50 x 34.3 x 52.5 (in) 1270 x 871 x 1334 (mm)
☐ SSRC5952	59 x 34.3 x 52.5 (in) 1499 x 871 x 1334 (mm)
☐ SSRC7752	77 x 34.3 x 52.5 (in) 1956 x 871 x 1334 (mm)

STANDARD FEATURES**Model Features: Self-Serve Bottom Display**

- Steel base construction with black exterior
- Black interior, glass end panels
- Two-tier black display step
- Easily accessible light switch and adjustable power switch located at case rear
- Rear access to refrigeration system for quick and easy service
- Adjustable leg levelers

Model Features: Service Top Display

- Divided merchandising area (36" models have one display area only)
- Tempered lift-up thermopane front glass

Refrigeration

- Condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40° F case temperature.
- Easy clean, rustproof insulated evaporator coil compartment
- Insulated with high-density urethane foam
- R290 refrigerant
- Thermometer
- Baffle system converts display from non-refrigerated to refrigerated (Service Top Display)

Shelving

- Adjustable black wire shelf

Lighting

- 3500K LED top and shelf light
- DLC Certified, IP66 rated

Agency Approvals

- UL and UL Sanitation listed
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

- ☐ Reflective End Glass

For Self-Serve Refrigerated Base

- ☐ Special Finish
- ☐ Energy Saving Night Curtain
- ☐ Security Night Cover
- ☐ Solid Rear Sliding Access Doors for Bottom Section
- ☐ Cord & Plug
- ☐ Remote Refrigeration (R449a Refrigerant, EEV Included)

- ☐ Black Wire or Glass Shelf with Light in Lieu of Display Steps

- ☐ Rear Wrapping Board

For Service Top Display

- ☐ Reflective Rear Doors
- ☐ Glass Shelves
- ☐ Casters (Recessed or 4") or 6" Legs



WARRANTY*
One year Parts and Labor
2nd thru 5th year part
only service compressor
(U.S.A and Canada)



Note: Information is subject to change at any time.
Visit www.federalind.com for the most current specs.

Revised 9/27/2025

AIA#

CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE SPECIALTY MERCHANDISER

SIS#

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)


DIMENSION TOLERANCE +/- 0.25 (6.4)

SYMBOL KEY:
 ELECTRICAL JUNCTION BOX
 (SUPPLIED W/6" LEADS OR POWER CORD)

 TUB DRAIN LOCATION

 REMOTE REFRIGERATION
LINE CONNECTION

OPTIONAL REMOTE REFRIGERATION:
CONDENSATE DISCHARGE HOSE LOCATION,
1/2" OD X 3/8" ID CLEAR TUBING

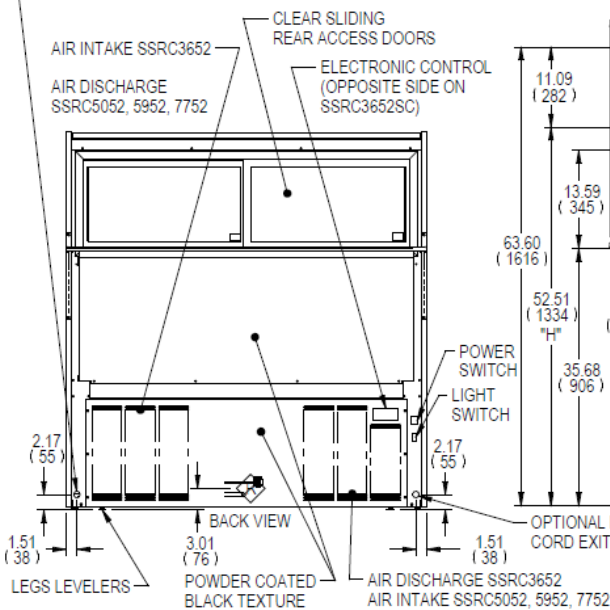

E3416 REV D

MODEL	DIMENSION						TUB DRAIN	SHELVING		TOP INTERIOR VOLUME CU FT	BOTTOM INTERIOR VOLUME CU FT	SELF CONTAINED				REFRIGERANT	SHIP WEIGHT LBS	REMOTE				SHIP WEIGHT LBS		
	L	D	H	L3	L4	L2		# OF TIERS	D			L1	PERMANENT CONNECT		OPTIONAL NEMA CORD & PLUG			PERMANENT CONNECT		REFRIGERANT	BTU'S @+20"		CONDENSATE REMOVAL	
													2-WIRE + GROUND					2-WIRE + GROUND						
													ELECTRICAL	AMPS				MAX FUSE SIZE	2-WIRE + GROUND					
																			AMPS					MAX FUSE SIZE
in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in				
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
SSRC3652	36.00	34.30	52.50	20.92	10.92	5.26	1	12.4	31.75	5.10	8.40	120/60/1	12.7	20	NEMA 5-20	R290	590 LBS	8.5	15	R449a	4,400	CONDENSATE PUMP	530 LBS	
	914	871	1334	531	277	134		315	806								240/60/1						240 KILO	
SSRC5052	50.00	34.30	52.50	25.60	10.92	25.00	1	12.4	45.75	7.10	11.80	208-240/60/1	7.0	15	NEMA 6-15	R290	720 LBS	10.0	15	R449a	5,400	CONDENSATE PUMP	660 LBS	
	1270	871	1334	650	277	635		315	1162								327 KILO						299 KILO	
SSRC5952	59.00	34.30	52.50	26.70	10.92	29.47	1	12.4	54.75	8.50	14.00	208-240/60/1	7.5	15	NEMA 6-15	R290	845 LBS	13.0	15	R449a	6,400	CONDENSATE PUMP	770 LBS	
	1499	871	1334	678	277	749		315	1391								383 KILO						349 KILO	
SSRC7752	77.00	34.30	52.50	26.70	10.92	38.47	1	12.4	72.75	11.20	18.30	208-240/60/1	7.5	15	NEMA 6-15	R290	1010 LBS	13.0	15	R449a	7,400	CONDENSATE PUMP	935 LBS	
	1956	871	1334	678	277	977		315	1848								458 KILO						424 KILO	

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- IF GFCI is required, a GFI Breaker must be used in lieu of GFCI receptacle.



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com