



*The Signature of Quality*

### FEDERAL INDUSTRIES

A Standex Company  
215 Federal Avenue  
Belleville, WI 53508-9201

Phone: 800-356-4206  
Fax: 608-424-3234  
Email: geninfo@federalind.com  
Website: www.federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA#

SIS#

## SELF-SERVE REFRIGERATED PREPARED FOODS MERCHANDISER

Designed for those customers looking for up-market styling for maximum visual appeal that will drive product sales.

MODEL	DIMENSIONS ( Includes End Panels )
<input type="checkbox"/> SSRPF3652	36 x 34 x 52 (in) 914 x 864 x 1321 (mm)
<input type="checkbox"/> SSRPF5052	50 x 34 x 52 (in) 1270 x 864 x 1321 (mm)
<input type="checkbox"/> SSRPF5952	59 x 34 x 52 (in) 1499 x 864 x 1321 (mm)
<input type="checkbox"/> SSRPF7752	77 x 34 x 52 (in) 1956 x 864 x 1321 (mm)

### STANDARD FEATURES

#### Model Features

- Steel base construction with black laminated exterior. Other finishes optional.
- Black interior, glass end panels
- Easily accessible light and power switch.
- Rear access to refrigeration system for quick and easy service
- The rear of the display needs to be 6" from wall.
- Adjustable leg levelers

#### Refrigeration

- On-demand PTC condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40° F with on-demand defrost. Note: Case temperature will vary if the air curtain is disrupted.
- Easy clean, rustproof insulated evaporator coil compartment
- R449a refrigerant
- Thermometer

#### Shelving

- Three tiers adjustable metal shelves

#### Lighting

- LED top light and shelf lights

#### Agency Approvals

- UL and UL Sanitation listed
- DOE 2017 Compliant

Model SSRPF5952 Shown

### OPTIONAL ACCESSORIES

- |                                                          |                                                                      |
|----------------------------------------------------------|----------------------------------------------------------------------|
| <input type="checkbox"/> Reflective End Glass            | <input type="checkbox"/> Remote Refrigeration (EEV Included)         |
| <input type="checkbox"/> Special Exterior Finish         | <input type="checkbox"/> 4" and 2 1/2" Recessed Casters              |
| <input type="checkbox"/> Glass Shelves                   | <input type="checkbox"/> Condensate Pump                             |
| <input type="checkbox"/> Energy Saving Night Curtain     | <input type="checkbox"/> Joining Kit for Continuous Line-ups         |
| <input type="checkbox"/> Security Night Cover            | <input type="checkbox"/> Front Non-Refrigerated Display Merchandiser |
| <input type="checkbox"/> Solid Rear Sliding Access Doors | <input type="checkbox"/> 6" Legs                                     |
| <input type="checkbox"/> Cord & Plug                     |                                                                      |



**WARRANTY\***  
One year Parts and Labor  
2nd thru 5th year part only service compressor  
(U.S.A and Canada)



Note: Information is subject to change at any time. Visit [www.federalind.com](http://www.federalind.com) for the most current specs.

AIA#

# SELF-SERVE REFRIGERATED PREPARED FOODS MERCHANDISER

SIS#


## Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)

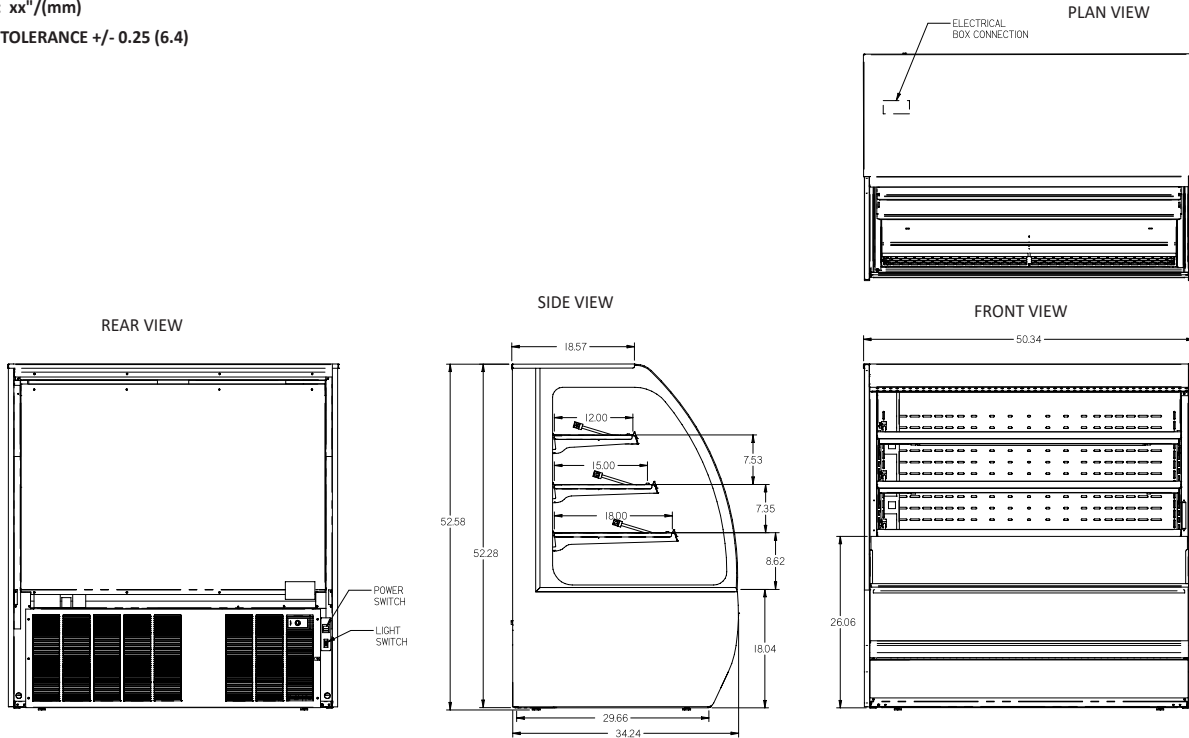

MODEL	DIMENSIONS				SHELVES	SHIPPING WHT		SELF CONTAINED Permanently Connected		H.P.	OPTIONAL NEMA PLUG	REMOTE WITH CONDENSATE PAN	
	L	D	H1	UNITS		LBS	KILO	VOLTAGE	AMPS		CONFIG (SC)	VOLTAGE	AMPS
SSRPF3652	36	34	52	in.	4	590	268	120/60/1	15 AMPS	1/3 HP	NEMA 5-20P	120/60/1	9 AMPS
	914	864	1321	mm.									
SSRPF5052	50	34	52	in.	4	720	327	208-240/60/1	10 AMPS	1/2 HP	NEMA 6-15P	120/60/1	10 AMPS
	1270	864	1321	mm.									
SSRPF5952	59	34	52	in.	4	845	383	208-240/60/1	15 AMPS	1/2 HP	NEMA 6-20P	120/60/1	13 AMPS
	1499	864	1321	mm.									
SSRPF7752	77	34	52	in.	4	1010	458	208-240/60/1	15 AMPS	3/4 HP	NEMA 6-20P	120/60/1	14 AMPS
	1956	864	1321	mm.									

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Electrical Requirement - The minimum circuit ampacity and maximum fuse size is 20 amps.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality®

**FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com