



The Signature of Quality®

### FEDERAL INDUSTRIES

A Standex Company  
215 Federal Avenue  
Belleville, WI 53508-9201

Phone: 800-356-4206  
Fax: 608-424-3234  
Email: geninfo@federalind.com  
Website: www.federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA#

SIS#

## SELF-SERVE REFRIGERATED PREPARED FOODS MERCHANDISER

Designed for those customers looking for up-market styling for maximum visual appeal that will drive product sales.



Model SSRPF5952 Shown

| MODEL                              | DIMENSIONS<br>( Includes End Panels )       |
|------------------------------------|---|
| <input type="checkbox"/> SSRPF3652 | 36 x 34 x 52 (in)<br>914 x 864 x 1321 (mm)  |
| <input type="checkbox"/> SSRPF5052 | 50 x 34 x 52 (in)<br>1270 x 864 x 1321 (mm) |
| <input type="checkbox"/> SSRPF5952 | 59 x 34 x 52 (in)<br>1499 x 864 x 1321 (mm) |
| <input type="checkbox"/> SSRPF7752 | 77 x 34 x 52 (in)<br>1956 x 864 x 1321 (mm) |

### STANDARD FEATURES

#### Model Features

- Steel base construction with black laminated exterior. Other finishes optional.
- Black interior, glass end panels
- Easily accessible light and power switch.
- Rear access to refrigeration system for quick and easy service
- The rear of the display needs to be 6" from wall.
- Adjustable leg levelers

#### Refrigeration

- On-demand PTC condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40° F with on-demand defrost. Note: Case temperature will vary if the air curtain is disrupted.
- Easy clean, rustproof insulated evaporator coil compartment
- Starting January 1, 2025, R449a refrigerant will be replaced by R290
- Thermometer

#### Shelving

- Three tiers adjustable metal shelves

#### Lighting

- LED top light and shelf lights

#### Agency Approvals

- UL and UL Sanitation listed
- DOE 2017 Compliant

### OPTIONAL ACCESSORIES

- |  |  |
|--|--|
| <input type="checkbox"/> Reflective End Glass            | <input type="checkbox"/> Remote Refrigeration (EEV Included)         |
| <input type="checkbox"/> Special Exterior Finish         | <input type="checkbox"/> 4" and 2 1/2" Recessed Casters              |
| <input type="checkbox"/> Glass Shelves                   | <input type="checkbox"/> Condensate Pump                             |
| <input type="checkbox"/> Energy Saving Night Curtain     | <input type="checkbox"/> Joining Kit for Continuous Line-ups         |
| <input type="checkbox"/> Security Night Cover            | <input type="checkbox"/> Front Non-Refrigerated Display Merchandiser |
| <input type="checkbox"/> Solid Rear Sliding Access Doors | <input type="checkbox"/> 6" Legs                                     |
| <input type="checkbox"/> Cord & Plug                     |  |



WARRANTY\*  
One year Parts and Labor  
2nd thru 5th year part  
only service compressor  
(U.S.A and Canada)



Note: Information is subject to change at any time.  
Visit [www.federalind.com](http://www.federalind.com) for the most current specs.

AIA#

# SELF-SERVE REFRIGERATED PREPARED FOODS MERCHANDISER

SIS#


## Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

| Zone | Intended Product To Be Displayed | Avg Prod Temp °F/°C |
|------|----------------------------------|---------------------|
| All  | Packaged Refrigerated Products   | 38°F / (3.3°C)      |

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)

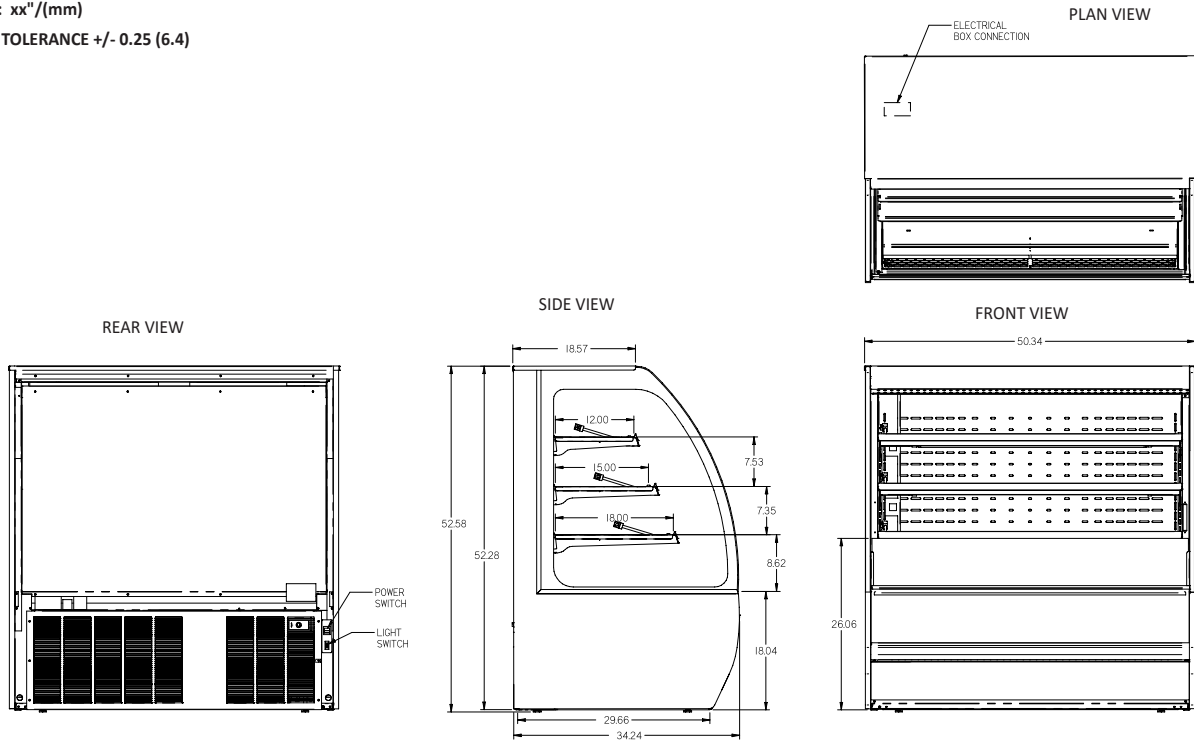

| MODEL     | DIMENSIONS |     |      |       | SHELVES | SHIPPING WHT |      | SELF CONTAINED<br>Permanently Connected |         | H.P.   | OPTIONAL<br>NEMA PLUG | REMOTE WITH<br>CONDENSATE PAN |         |
|-----------|------------|-----|------|-------|---------|--------------|------|---|---------|--------|-----------------------|-------------------------------|---------|
|           | L          | D   | H1   | UNITS |         | LBS          | KILO | VOLTAGE                                 | AMPS    |        | CONFIG (SC)           | VOLTAGE                       | AMPS    |
| SSRPF3652 | 36         | 34  | 52   | in.   | 4       | 590          | 268  | 120/60/1                                | 15 AMPS | 1/3 HP | NEMA 5-20P            | 120/60/1                      | 9 AMPS  |
|           | 914        | 864 | 1321 | mm.   |         |              |      |   |         |        |                       |                               |         |
| SSRPF5052 | 50         | 34  | 52   | in.   | 4       | 720          | 327  | 208-240/60/1                            | 10 AMPS | 1/2 HP | NEMA 6-15P            | 120/60/1                      | 10 AMPS |
|           | 1270       | 864 | 1321 | mm.   |         |              |      |   |         |        |                       |                               |         |
| SSRPF5952 | 59         | 34  | 52   | in.   | 4       | 845          | 383  | 208-240/60/1                            | 15 AMPS | 1/2 HP | NEMA 6-20P            | 120/60/1                      | 13 AMPS |
|           | 1499       | 864 | 1321 | mm.   |         |              |      |   |         |        |                       |                               |         |
| SSRPF7752 | 77         | 34  | 52   | in.   | 4       | 1010         | 458  | 208-240/60/1                            | 15 AMPS | 3/4 HP | NEMA 6-20P            | 120/60/1                      | 14 AMPS |
|           | 1956       | 864 | 1321 | mm.   |         |              |      |   |         |        |                       |                               |         |

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Electrical Requirement - The minimum circuit ampacity and maximum fuse size is 20 amps.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality®

**FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com