

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: geninfo@federalind.com Website: www.federalind.com

Project Name:		AIA#
Item #:		
Model #:	_ Qty:	SIS#
Approval:		

SANDWICH or SALAD PREP CASE OVER REFRIGERATED SELF-SERVE SPECIALTY MERCHANDISER

Prepare sandwiches or salads and serve more customers with presentation and value in mind.

MODEL	DIMENSIONS (Includes End Panels)
□ SSRSP5052	50 x 34.3 x 52.4 (in)
	1270 x 871 x 1331 (mm)
□ SSRSP5952	59 x 34.3 x 52.4 (in)
	1499 x 871 x 1331 (mm)
□ SSRSP7752	77 x 34.3 x 52.4 (in)
	1956 x 871 x 1331 (mm)



SSRSP5952 Shown

STANDARD FEATURES

Model Features: Refrigerated Self-Serve Bottom Display

- All-steel base construction with a choice of six standard laminates on base. Other finishes optional
- Black interior, glass end panels
- Easily accessible light, power switch, and adjustable temperature control.
- Rear access to refrigeration system for quick and easy service
- Energy-saving night curtain
- Adjustable Leg Levelers

Model Features: Top Prep Area

- Stainless steel condiment pan well
- 10" deep prep work space with scrap receptacle
- Lift-up curved front glass
- Glass ends
- Condiment pan rails provided. Note: Pans are not supplied with case

Refrigeration

- PTC condensate evaporator provided for a totally self-contained system
- Electronic temperature controls maintain 38°-40°F with on-demand defrost
- Easy clean, rustproof insulated evaporator coil compartment
- ECM fan motors
- R290 Refrigerant
- Thermometer

Shelving

Solid black shelf

Lighting

• LED top and under-shelf lights

Agency Approvals

- UL and UL Sanitation listed
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

- □ Reflective End Glass
- ☐ Special Exterior Finish
- ☐ Glass Shelves
- □ Energy Saving Night Curtain
- □ Security Night Cover
- ☐ Solid Rear Sliding Access Doors
- □ Cord & Plug

- □ Remote Refrigeration (EEV Included)
- □ Recessed Casters
- □ Condensate Pump
- $\hfill\Box$ Joining Kit for Continuous Line-ups
- ☐ Front Non-Refrigerated Display Merchandiser
- □ Legs











AIA#

SANDWICH or SALAD PREP CASE OVER REFRIGERATED SELF-SERVE SPECIALTY MERCHANDISER

SIS#


Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

- 1		71 0 1	,	,
	Zone	Intended Product To Be Displayed		Avg Prod Temp °F/°C
	All	Packaged Refrigerated Products		38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)

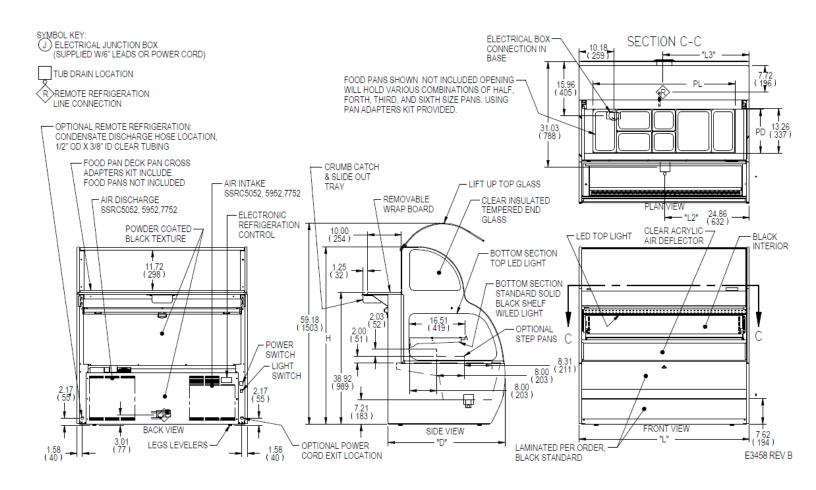

															SELF CONTAINED							REMOTE					
		DIMENSION			TUB DRAIN	FOOD	PAN OPENING		SHELVING		INTERIOR	PERMANENT CONNECT		OPTIONAL			SHIP	PERMANENT CONNECT		Г			SHIP				
MODEL		L E)	1	L3	L2		PL PD		D	L	VOLUME	2-WIRE + GROUND		NEMA CORD	CONDENSATE	WEIGHT	2-W	IRE + GROUND	REFRIGERANT	BTU'S	CONDENSATE	WEIGHT				
	i	in i	n ii	n	in	in	PANS 4" DEEP	in	in	TIERS	in	in	воттом	OTTOM ELECTRICAL	AMPS	MAX FUSE	2-WIRE +	REFRIGERANT	REMOVAL	LBS		120/60/1	KEFKIGEKANI	@+20°	REMOVAL	LBS	
	m	nm m	m m	m r	nm	mm	DEEP	mm	mm	HERS	mm	mm	CU FT	ELECTRICAL	AIVIPS	SIZE	GROUND			KILO	AMPS	MAX FUSE SIZE	Ī			KILO	
SSRSP5052	50	0.0 34	.3 52	.4 2	5.6	24.26	(4) HALF	41.9	12.9	1	16.5	46.3	11.80	208-240/60/1	7.0	15 6-15	6.15	R290	CONDENSATE	690 LBS	10.0	15	R449a	5,400	CONDENSATE	630 LBS	
33K3F3U3Z	12	270 87	1 13	31 6	550	616	PANS	1064	328		419	1176	11.80				6-15		PAN	313 KILO					PUMP	286 KILO	
SSRSP5952	59	9.0 34	.3 52	.4 2	6.7	28.76	(5) HALF	52.2	12.9	1	16.5	55.2	14.00	208-240/60/1	7.5	.5 15	6-20	R290	CONDENSATE	735 LBS	12.0	15	R449a	6,400	CONDENSATE	660 LBS	
33K3F 3332	14	499 87	1 13	31 6	78	730	PANS	1326	328	1	419	1402	14.00						PAN	333 KILO		13			PUMP	299 KILO	
SSRSP7752		7.0 34	.3 52	.4 2	6.7	37.76	(7) HALF	73.2	12.9	1	16.5	73.2	18.30	208-240/60/1	7.5	15	6-20	R290	CONDENSATE	940 LBS	12.0	15	R449a	7,400	CONDENSATE	865 LBS	
33N3P7732	19	1956 871 1331 678 959 PA	PANS	1859	328		419	19 1859	10.30	200-240/00/1	7.5	13	0-20	11290	PAN	426 KILO	12.0	N 44 3d	7,400	PUMP	392 KILO						

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.









FEDERAL INDUSTRIESA Standex Company

Phone: 800-356-4206

215 Federal Avenue, Belleville, Wisconsin 53508-9201