

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201 Phone: 800-356-4206 Fax: 608-424-3234 Email: geninfo@federalind.com Website: www.federalind.com

		AIA#
Item #:		
Model #:	_ Qty:	SIS#
Approval:		

UNDER COUNTER - Square End, Refrigerated, Self-Serve Display Case

Incorporate into your own counter to drive product sales. The under counter display case will entice customers with last minute impulse sales through visual appeal.



Shown with optional accessories

OPTIONAL ACCESSORIES

- □ White or stainless interior (Including step riser or shelf)
- □ Glass, stainless steel, white or black solid shelf w/ LED light
- □ Special exterior finish
- □ Stainless Exterior including Top
- □ Energy saving night curtain
- □ Security night cover
- □ Condensate pump
- □ Rear door (available with single step riser)

□ 6" Legs

- □ 4" Casters
- □ Rear air intake / front discharge

MODEL	DIMENSIONS (Includes End Panels)
UCR3633S	35.7 x 34 x 32.5 (in) 907 x 864 x 826 (mm)
UCR4833S	47.7 x 34 x 32.5 (in) 1212 x 864 x 826 (mm)
UCR6033S	59.7 x 34 x 32.5 (in) 1516 x 864 x 826 (mm)
UCR7233S	71.7 x 34 x 32.5 (in) 1821 x 864 x 826(mm)

STANDARD FEATURES

Model Features

- Black powder coated steel base
- Black interior back panel
- Squared ends with mirrored interior
- Black top
- Black 2 step riser
- Black laminate exterior. Other finishes optional
- Light and power switch on back of case
- Front access to refrigeration system for quick and easy service
- Cord & plug
- Adjustable leg levelers
- Recessed casters

Refrigeration

- On-Demand PTC condensate evaporator provided
- for a totally self-contained system
- Electronic temperature controls maintain 38°-40°F
- Easy clean, rustproof insulated evaporator coil
- compartment
- Rear condensing unit air intake & discharge
- R290 refrigerant

Lighting

• LED top light

Agency Approvals


- UL, C-UL and UL Sanitation listed to NSF-7, Type II conditions
- DOE 2017 compliant



WARRANTY* One year Parts and Labor 2nd thru 5th year part only service compressor (U.S.A and Canada)



Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

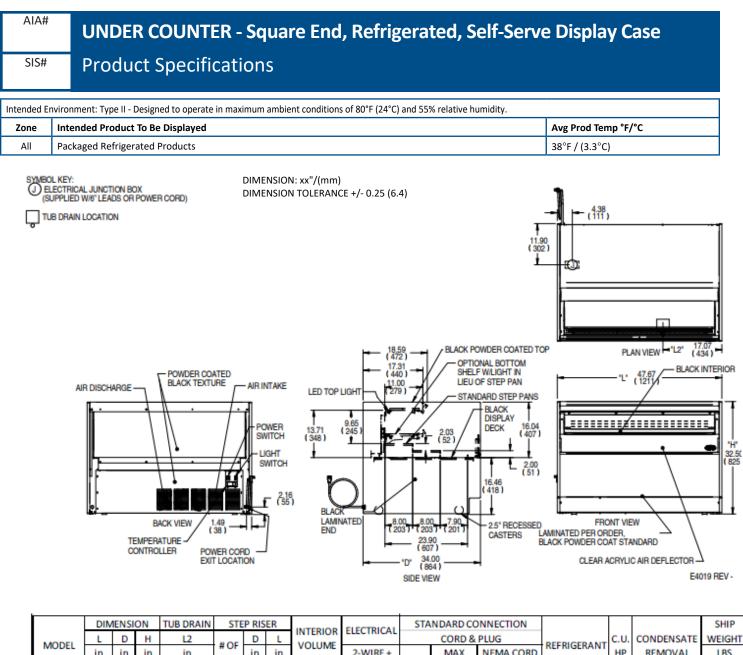

MODEL	DIMENSION		TUB DRAIN	SIE	P RIS	EK	INITEDIOD	ELECTRICAL	STANDARD CONNECTION				.		SHIP	
	L	D	н	L2	# OF STEPS	D	L	VOLUME CU FT	ELECTRICAL		CORD &	REFRIGERANT	C.U.	CONDENSATE	WEIGHT	
	in	in	in	in		in	in		2-WIRE +	AMPS	MAX	NEMA CORD	REFRIGERANT	HP	REMOVAL	LBS
	mm	mm	mm	mm			mm		GROUND		FUSE SIZE	& PLUG				KILO
UCR3633S	35.7	34.0	32.5	4.34	2	8.00	33.6	4.52	120/60/1	12.3	20	5-20	R290	1/2	CONDENSATE	450 LBS
	907	864	826	110		203	853								PAN	204 KILO
UCR4833S	47.7	34.0	32.5	17.01	2	8.00	45.6	6.11	120/60/1	12.5	20	5-20	R290	1/2	CONDENSATE	605 LBS
	1212	864	826	432		203	1158								PAN	274 KILO
UCR6033S	59.7	34.0	32.5	26.01	2	8.00	57.6	7.70	120/60/1	13.0	20	5-20	R290	3/4	CONDENSATE	760 LBS
	1516	864	826	661		203	1463								PAN	345 KILO
UCR7233S	71.7	34.0	32.5	33.01	1 2 1	8.00	69.6	9.28	120/60/1	13.5	20	5-20	R290	3/4	CONDENSATE	915 LBS
	1821	864	826	838		203	1768								PAN	415 KILO

• Case temperature will vary if the air curtain is disrupted.

Due to continuing engineering improvements, specifications are subject to change without notice.



FEDERAL INDUSTRIES A Standex Company 215 Federal Avenue Belleville, Wisconsin 53508-9201



Phone: 800-356-4206 Fax: 608-424-3234 Email: Geninfo@Federalind.com Website: Federalind.com