



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_


Approval: \_\_\_\_\_

AIA #

SIS #

VISION SERIES - FLEX™ - 3-in-1 Multifunctional Merchandiser - 60"

Maximize limited space and expand your menu offering with the ability to "flex" between heated, refrigerated, or ambient food and beverages using a single 60"H 3-in-1 grab-and-go multifunctional merchandiser.

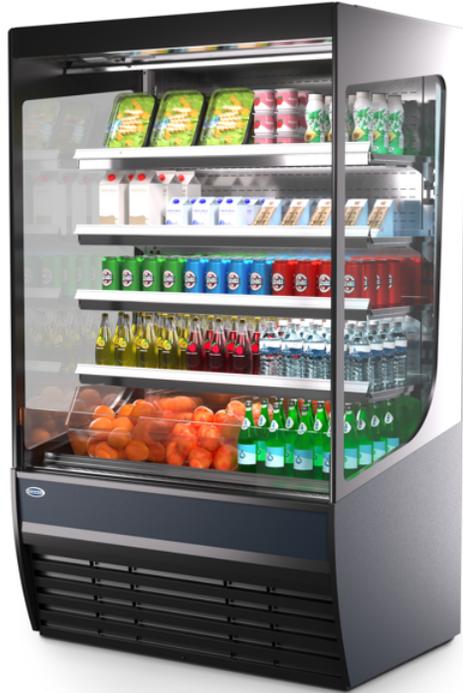

Model VFSS3678S shown

Table with 2 columns: MODEL and DIMENSIONS (Includes End Panels). Rows include VFSS3660S and VFSS4860S with their respective dimensions.

STANDARD FEATURES

Model Features

- Stainless steel interior including shelves
Removable heated stainless steel display deck
Tempered glass square ends
Black powder coated base frame
Moisture resistant lower end panel construction
Choice of standard colors on lower ends and lower front panel
Black trim
Adjustable leg levelers
Cord & 90 degree plug
Front air intake / front discharge
Energy saving night curtain

Refrigeration

- R290 Refrigerant
Electronic temperature control maintains 38° - 40°F (3.3° - 4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
On-demand PTC condensate evaporator provided for totally self-contained system
Digital thermometer
Clear Coil™ on demand defrost
# h
Coated evaporator coil

Heating System

- Independently controlled heated shelves and deck
Holds up to an average temperature of 160°F (71°C)

Shelving

- Three tiers of adjustable stainless steel shelves with price tag molding.
Shelves can be flat or tilted down at 10°

Lighting

- 3500K LED top light

Agency Approvals

- UL, C-UL, and UL Sanitation listed to NSF-7, Type I conditions
DOE 2017 compliant

OPTIONAL ACCESSORIES

- 3500K LED lights below shelves
Self-cleaning condenser (reversing fan)
Stainless steel exterior finish
Premium exterior laminate
Graphics package
Solid end panels (mirrored interior)
Reflective end glass
Clear or reflective sliding rear doors (Solid swinging doors on 36" cases)
2 1/2" Casters
2 1/2" Recessed casters
2 1/2" Casters with skirt
4" Casters
4" Casters with skirt
6" Legs
6" Legs with skirt
6" Seismic legs
Front wire display basket
Cart bumper, front only
Cart bumper 3-sides
Roll-down locking security cover (black, white, or gray)
Black polycarbonate removable locking security cover
Wire shelf and deck racks
White or stainless steel trim
Rear air intake and discharge
High output condensate pan
Condensate drain
Condensate pump in lieu of pan

\*Additional options available on the website and price list



WARRANTY\* One year Parts and Labor 2nd thru 5th year part only service compressor (U.S.A. and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

|       |   |
|-------|---|
| AIA # | <b>VISION SERIES FLEX - 3-in-1 Multifunctional Merchandiser - 60"</b> |
| SIS # | Product Specifications  |


|  |   |  |
|--|---|--|
| Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity. |   |  |
| <b>Zone</b>  | Intended Product To Be Displayed            | <b>Avg Prod Temp °F/°C</b>                             |
| All  | Packaged Refrigerated or Heated Merchandise | Refrigerated 38°F / (3.3°C)<br>Heated 160°F / (71.1°C) |

**DIMENSION: xx"/(mm)**

**DIMENSION TOLERANCE +/- 0.25 (6.4)**

- SYMBOL KEY:
- Ⓝ ELECTRICAL JUNCTION BOX (SUPPLIED W/6" LEADS OR POWER CORD)
  - TUB DRAIN LOCATION

NOTE:  
1" CLEARANCE NEEDED BEHIND UNIT

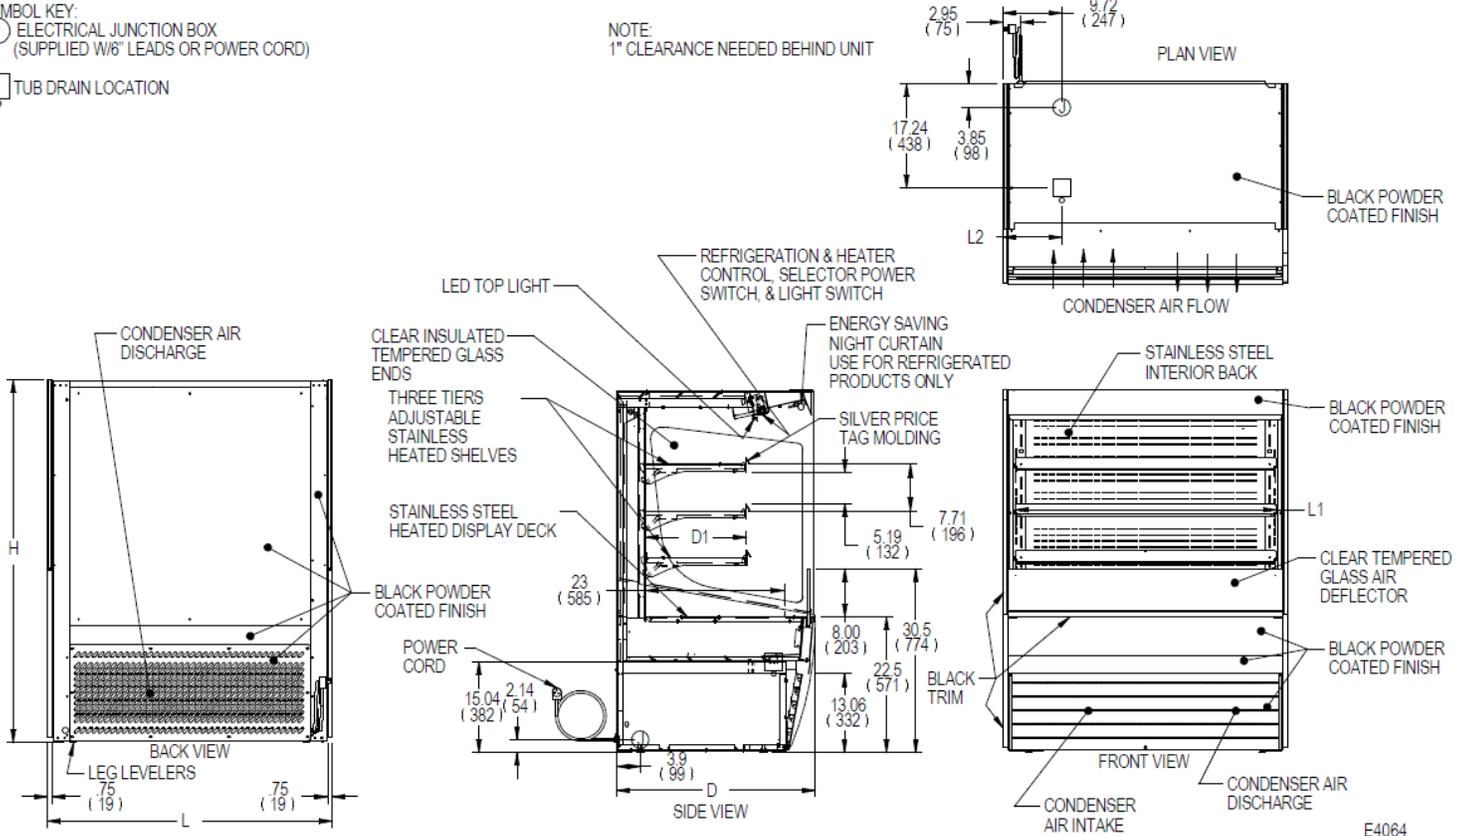

E4064

| MODEL     | DIMENSIONS |     |      | TUB DRAIN | SHELVING   |       |      | INTERIOR VOLUME CU FT | ELECTRICAL | R290 REFRIGERATION SELF CONTAINED |           |             |                |                  | SHIP WEIGHT |                    |
|-----------|------------|-----|------|-----------|------------|-------|------|-----------------------|------------|-----------------------------------|-----------|-------------|----------------|------------------|-------------|--------------------|
|           | L          | D   | H    | L2        | # OF TIERS | L1    | D1   |                       |            | STANDARD CONNECTION CORD & PLUG   |           |             |                |                  |             |                    |
|           | in         | in  | in   | in        |            | in    | in   |                       |            | 2 WIRE + GROUND                   | REFR AMPS | HEATED AMPS | MAX FUSE SIZE  | NEMA CORD & PLUG |             | CONDENSATE REMOVAL |
|           | mm         | mm  | mm   | mm        |            | mm    | mm   |                       |            |                                   |           |             |                |                  |             |                    |
| VFSS3660S | 36         | 33  | 60   | 6.74      | 3          | 32.25 | 16.6 | 208-240/60/1          | 10.3       | 11.7                              | 20        | NEMA 6-20P  | INTEGRATED PAN | 500              |             |                    |
|           | 914        | 838 | 1524 | 171       |            | 819   | 422  |                       |            |                                   |           |             |                | 227              |             |                    |
| VFSS4860S | 47.25      | 33  | 60   | 13.49     | 3          | 43.25 | 16.6 | 208-240/60/1          | 11.0       | 16.3                              | 20        | NEMA 6-20P  | INTEGRATED PAN | 590              |             |                    |
|           | 1200       | 838 | 1524 | 343       |            | 1099  | 422  |                       |            |                                   |           |             |                | 268              |             |                    |

- Due to continuing engineering improvements, specifications are subject to change without notice.
- Case temperature will vary if the air curtain is disrupted.



**FEDERAL INDUSTRIES**  
A Standex Company  
215 Federal Avenue Belleville, Wisconsin 53508-9201

**Phone:** 800-356-4206  
**Fax:** 608-424-3234  
**Email:** Geninfo@Federalind.com  
**Website:** Federalind.com