

#### **FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue

Belleville, Wisconsin 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

**Email:** Geninfo@Federalind.com **Website:** Federalind.com

Project Name:	AIA #
Item #:	
Model #: Qty:	SIS#
Approval:	

# **VISION SERIES - Slim-Line Display Case - 78"**

Designed to help you make the most of your limited space with a slim 24" depth while delivering a bold, attention-grabbing design that highlights your merchandise.



Model VRSL7278S Shown with Options

## **OPTIONAL ACCESSORIES**

- White interior (including shelves)
- Stainless steel interior (including shelves)Stainless steel or glass shelves in lieu of black
- ☐ 3500K LED lights below shelves
- ☐ Additional lighted 3500K LED shelf
- High-capacity condensate evaporator
- ☐ Self-cleaning condenser
- Stainless steel exterior finish
- Premium exterior laminate

Graphics	package

- Solid end panels (mirrored interior)
- Reflective end glass
- Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases)
- 6" legs (152mm)
  - Seismic legs
- Skirt w/4" casters or legs
- 2 1/2" (63.5mm) recessed or
  - 4" (101.6mm) casters (self-contained models only) (Weight limits may apply)
  - Joining kit for continuous line-ups (not available with casters)
- Front wire display basket
- Front cart bumper
- Roll-Down locking security cover (black, white, or gray)
- Black polycarbonate removable locking security cover

## \*Additional options available on the website and price list.











# WARRANTY\* One year Parts and Labor 2nd thru 5th year part only service compressor

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

MODEL	DIMENSIONS (Includes End Panels)						
□ VRSL3678S	36 x 24 x 78 (in) 914 x 610 x 1981 (mm)						
□ VRSL4878S	47.25 x 24 x 78 (in) 1200 x 610 x 1981 (mm)						
□VRSL6078S	59.25 x 24 x 78 (in) 1505 x 610 x 1981 (mm)						
□ VRSL7278S	71.25 x 24 x 78 (in) 1810 x 610 x 1981 (mm)						

## STANDARD FEATURES

#### **Model Features**

- Black interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant end panel construction
- Choice of standard colors on lower millwork panel
- Black trim
- Adjustable leg levelers
- Cord & plug, self-contained only
- Front air intake / rear discharge
- Energy saving night curtain

## Refrigeration

- R290 refrigerant
- Electronic temperature control maintains 38°-40°F (3.3°-4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- Coated evaporator coil

#### **Shelving**

- Four tiers of adjustable black metal shelves with black price tag molding.
- Shelves can be flat or slanted down at 10°.

#### Lighting

• 3500K LED top light

#### **Agency Approvals**

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

AIA#

## **VISION SERIES - Slim-Line Display Case - 78"**


SIS#

**Product Specifications** 

Intended Environment: Type I (Self-Contained) - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.

ŀ	Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
Ī	All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)
DIMENSION TOLERANCE +/- 0.25
(6.4)

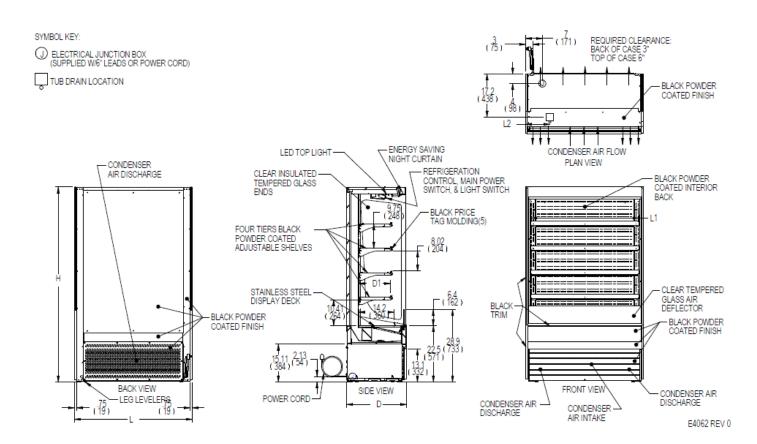

	DIMENSIONS			TUB DRAIN	SHELVING			INITEDIOD	ELECTRICAL	STANDARD CONNECTION						SHIP	
MODEL	L	D	Н	L2	# OF TIERS	L1	D1	VOLUME CU FT	ELECTRICAL	CORD & PLUG		DEEDICEDANIT	C.U.	CONDENSATE	WEIGHT		
MODEL	in	in	in	in		in	in		2 WIRE +	AMPS	MAX	NEMA	REFRIGERANT	HP	REMOVAL	LBS	
	mm	mm	mm	mm		mm	mm		GROUND		FUSE SIZE	CORD &				KILO	
VRSL3678S	36	24	78	6.74	4	32.25	12.6	13.30	120/60/1	15.2	20	NEMA	R290 3/4	2/4	INTEGRATED	500	
VK3L30783	914	610	1981	171		819	320					5-20P		3/4	PAN	227	
VRSL4878S	47.25	24	78	13.49	4	43.25	12.6	17.70	208-240/60/1	16.2	20	NEMA	R290	1	INTEGRATED	590	
VN3L40703	1200	610	1981	343		1099	320					6-20P			PAN	268	
VRSL6078S	59.25	24	78	14.12	4	1	55.25	12.6	22.70	208-240/60/1	17	20	NEMA	R290	(2)3/4	INTEGRATED	750
VN3L00763	1505	610	1981	359		1403	320	22.70	200-240/00/1	1/	20	6-20P	K290	(2)3/4	PAN	340	
VRSL7278S	71.25	24	78	20.12	4	67.25	12.6	27.60	208-240/60/1	17	20	NEMA	R290	(2)3/4	INTEGRATED	810	
VN3L/2/83	1810	610	1981	511		1708	320					6-20P			PAN	367	

- Due to continuing engineering improvements, specifications are subject to change without notice
- Case temperature will vary if the air curtain is disrupted.









**Phone:** 800-356-4206 **Fax:** 608-424-3234

**Email:** Geninfo@Federalind.com **Website:** Federalind.com