

	FR			

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234 Email: Geninfo@Federalind.com Website: Federalind.com

Project Name:	AIA#
Item #:	
Model #: Qty:	SIS#
Approval:	

VISION SERIES - Slim-Line Display Case - 78"

Designed to help you make the most of your limited space with a slim 24" depth while delivering a bold, attention-grabbing design that highlights your merchandise.



Model VRSL7278S Shown with Options

OPTIONAL ACCESSORIES Graphics package Solid end panels (mirrored interior) Reflective end glass White interior (including shelves) Clear or reflective glass, sliding rear ☐ Stainless steel interior (including shelves) doors (Solid hinged on 36" cases) Stainless steel or glass shelves in lieu of black 6" legs (152mm) ☐ 3500K LED lights below shelves Seismic legs Additional lighted 3500K LED shelf Skirt w/4" casters or legs ☐ High output condo pan - self-contained 2 1/2" (63.5mm) recessed or units only 4" (101.6mm) casters (self-contained Self-cleaning condenser models only) (Weight limits may apply) ☐ Stainless steel exterior finish Joining kit for continuous line-ups (not Premium exterior laminate available with casters) Front wire display basket Front cart bumper Roll-Down locking security cover (black, white, or gray) ☐ Black polycarbonate removable locking security cover

MODEL	DIMENSIONS (Includes End Panels)
□ VRSL3678S	36 x 24 x 78 (in) 914 x 610 x 1981 (mm)
□ VRSL4878S	47.25 x 24 x 78 (in) 1200 x 610 x 1981 (mm)
□VRSL6078S	59.25 x 24 x 78 (in) 1505 x 610 x 1981 (mm)
□ VRSL7278S	71.25 x 24 x 78 (in) 1810 x 610 x 1981 (mm)

STANDARD FEATURES

Model Features

- Black interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant end panel construction
- Choice of standard colors on lower millwork panel
- Black trim
- Adjustable leg levelers
- Cord & 90 degree plug, self-contained only
- Front air intake / front discharge
- Energy saving night curtain

Refrigeration

- R290 refrigerant
- Electronic temperature control maintains 38°-40°F (3.3°-4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- · Clear coil on demand defrost
- Coated evaporator coil

Shelving

- Four tiers of adjustable black metal shelves with black price tag molding.
- Shelves can be flat or slanted down at 10°.

Lighting

• 3500K LED top light

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant







*Additional options available on the website and price list.





WARRANTY*
One year Parts and Labor
2nd thru 5th year part only
service compressor
(U.S.A. and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs. AIA#

VISION SERIES - Slim-Line Display Case - 78"


SIS#

Product Specifications

Intended Environment: Type I (Self-Contained) - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.

L			
	Zone	Avg Prod Temp °F/°C	
Ī	All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)
DIMENSION TOLERANCE +/- 0.25
(6.4)

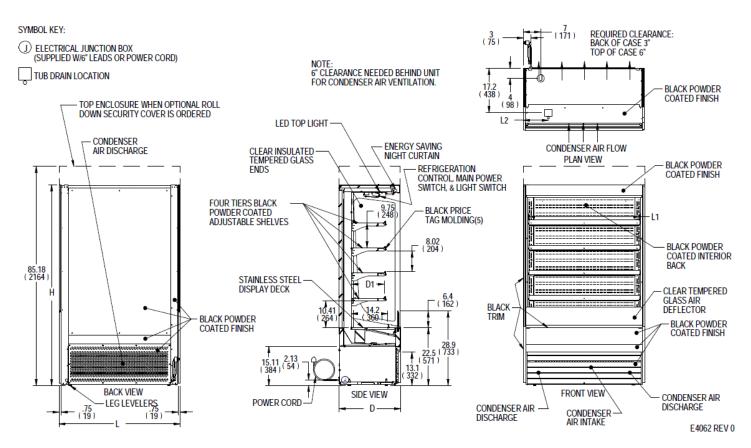

							SELF CONTAINED									
	DIMENSIONS		TUB DRAIN	SHELVING		INTERIOR	ELECTRICAL	STANDARD CONNECTION				SHIP				
MODEL	L	D	Н	L2	# OF TIERS	L1	D1	VOLUME CU FT	ELECTRICAL	CORD & PLUG		REFRIGERANT	CONDENSATE	WEIGHT		
MODEL	in	in	in	in		in	in		2 WIRE +	ANADO	MAX	NEMA	REFRIGERANT	REMOVAL	LBS	
	mm	mm	mm	mm		mm	mm		GROUND	AMPS	FUSE SIZE	CORD &			KILO	
VRSL3678S	36	24	78	6.74	4	32.25 12.6 13.30	120/60/1 16	16 20	NEMA	R290	INTEGRATED	500				
VK3L30783	914	610	1981	171] 4	819	320	15.30	120/60/1	10	20	5-20P	K290	PAN	227	
VRSL4878S	47.25	24	78	13.49	4	43.25	12.6	17.70	17.70 20	208-240/60/1	11	11 15	NEMA	R290	INTEGRATED	590
VK3L48783	1200	610	1981	343	4	1099	1099 320 17.70	208-240/60/1	11	15	6-15P	K290	PAN	268		
VRSL6078S	59.25	24	78	14.12	4	55.25	12.6	22.70	22.70 208-240/60/1 16 20 NEMA 6-20P R290	P200	INTEGRATED	750				
VK3L00763	1505	610	1981	359	4	1403	403 320 22.70	22.70		10	20	6-20P	11290	PAN	340	
VRSL7278S	71.25	24	78	20.12		67.25	12.6	27.60	208-240/60/1	16	20	NEMA	R290	INTEGRATED	810	
VR3L/2/83	1810	610	1981	511	4	1708	320					6-20P		PAN	367	

- Due to continuing engineering improvements, specifications are subject to change without notice
- Case temperature will vary if the air curtain is disrupted.









Email: Geninfo@Federalind.com
Website: Federalind.com