

**FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue  
Belleville, Wisconsin 53508-9201**Phone:** 800-356-4206**Fax:** 608-424-3234**Email:** Geninfo@Federalind.com**Website:** Federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA #

SIS #

**VISION SERIES - Milk Display Case**

Designed with school nutrition in mind, the Milk Display Case enhances accessibility, visibility, and security. It ensures that students can easily access fresh milk and other cold products.



Model VRSL3683S-MLK  
Shown with Options

**MODEL**☐ VRSL3683S-MLK**DIMENSIONS**

(Includes End Panels)

36 x 24.2 x 82.75 (in)  
914 x 615 x 2102 (mm)**STANDARD FEATURES****Model Features**

- White interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant end panel construction
- Choice of standard colors on lower millwork panel
- Black trim
- Adjustable leg levelers
- Cord & plug, self-contained only
- Front air intake / rear discharge
- Energy saving night curtain

**Refrigeration**

- R290 refrigerant
- Electronic temperature control maintains 38°-40°F (3.3°-4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- Coated evaporator coil
- Top mount condensing unit
- Self-Contained Refrigeration

**Shelving**

- Three tiers of adjustable white metal shelves with price tag molding.
- Shelves can be flat or slanted down at 10°.

**Lighting**

- 3500K LED top light

**Agency Approvals**

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

**OPTIONAL ACCESSORIES**

- ☐ Black interior (including shelves)
- ☐ Stainless steel interior (including shelves)
- ☐ Stainless steel or glass shelves in lieu of white
- ☐ 3500K LED lights below shelves
- ☐ Additional lighted 3500K LED shelf
- ☐ High-capacity condensate evaporator assembly
- ☐ Self-cleaning condenser
- ☐ Stainless steel exterior finish
- ☐ Premium exterior laminate
- ☐ Graphics package
- ☐ Solid end panels (mirrored interior)
- ☐ Reflective end glass
- ☐ Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases)
- ☐ 6" legs (152mm)
- ☐ Seismic legs
- ☐ Skirt w/4" casters or legs
- ☐ 2 1/2" (63.5mm) recessed or 4" (101.6mm) casters (self-contained models only) (Weight limits may apply)
- ☐ Joining kit for continuous line-ups (not available with casters)
- ☐ Front wire display basket
- ☐ Front cart bumper
- ☐ Roll-Down locking security cover (black, white, or gray)
- ☐ Black polycarbonate removable locking security cover

\*Additional options available on the website and price list.



**WARRANTY\***  
One year Parts and Labor  
2nd thru 5th year part only  
service compressor  
(U.S.A. and Canada)


**Note:** Information is subject  
to change at any time. Visit  
[www.federalind.com](http://www.federalind.com) for the  
most current specs.

AIA #	<b>VISION SERIES - Milk Display Case</b>	
SIS #	Product Specifications	

Intended Environment: Type I (Self-Contained) - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.		
Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

**DIMENSION: xx"/(mm)**  
**DIMENSION TOLERANCE +/- 0.25**  
**(6.4)**

- SYMBOL KEY:
- ELECTRICAL JUNCTION BOX (SUPPLIED W/6" LEADS OR POWER CORD)
  - TUB DRAIN LOCATION

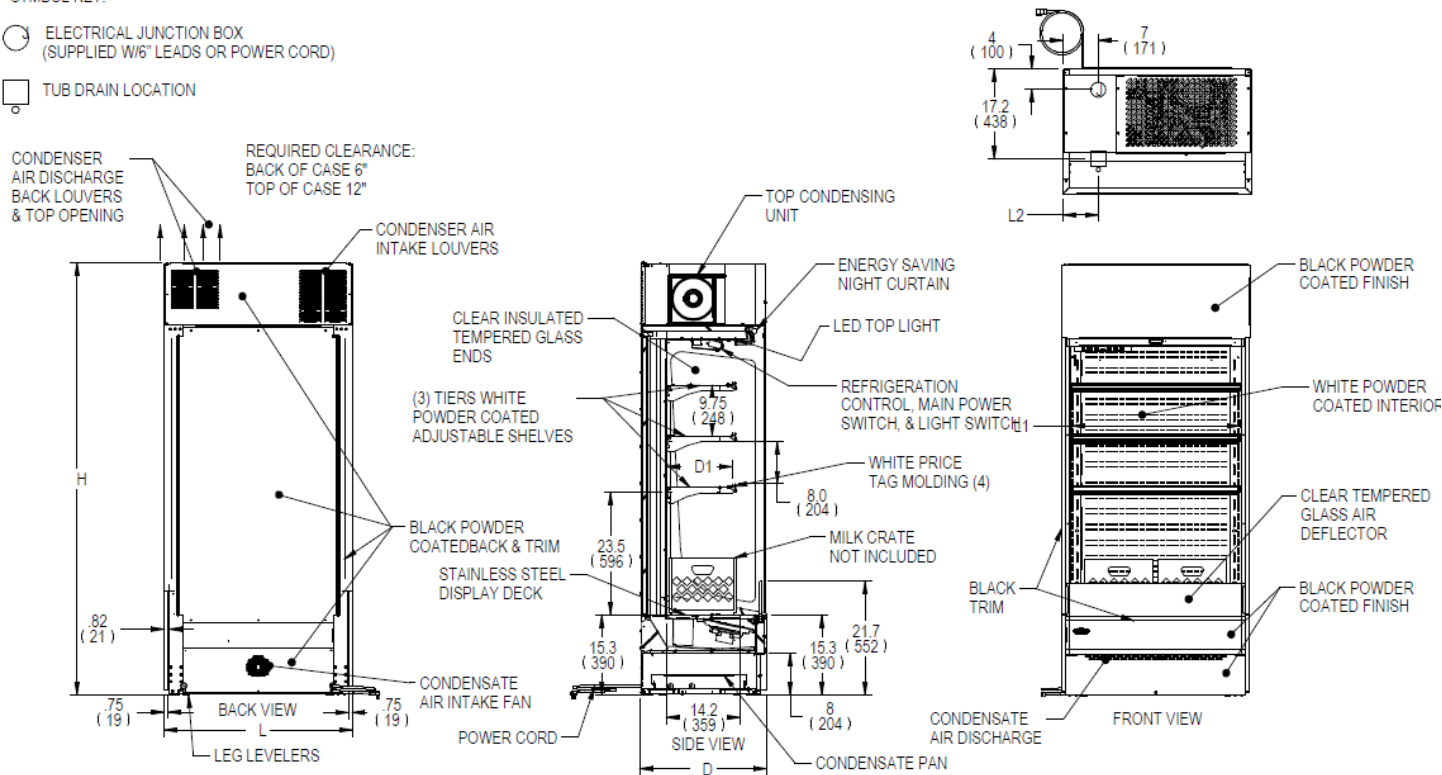

E4063 REV 0

									SELF CONTAINED							
MODEL	DIMENSIONS			TUB DRAIN	SHELVING			INTERIOR VOLUME CU FT	ELECTRICAL	STANDARD CONNECTION CORD & PLUG			REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	
	L	D	H	L2	# OF TIERS	L1	D1		2 WIRE + GROUND	AMPS	MAX FUSE SIZE	NEMA CORD &			LBS	
	in	in	in	in		in	in									KILO
	mm	mm	mm	mm		mm	mm									
VRSL3683-MLK	36	24.2	82.75	6.7	3	32.25	12.6	13.30	120/60/1	16	20	NEMA 5-20P	R290	INTEGRATED PAN	500	
	914	615	2102	170		819	320								227	

- Due to continuing engineering improvements, specifications are subject to change without notice.
- Case temperature will vary if the air curtain is disrupted.

