



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

VISION SERIES - High Profile Self-Serve Refrigerated Case - 60"

Designed with impulse sales in mind. Get maximum return from an attention-grabbing case and increase profits.



Model VRSS3660C Solid
Ends Shown

OPTIONAL ACCESSORIES

- | | |
|--|--|
| ☐ 3500K LED lights below shelves | ☐ Graphics package |
| ☐ White interior (including shelves) | ☐ Solid end panels (mirrored interior) |
| ☐ Stainless steel interior (including shelves) | ☐ Reflective end glass |
| ☐ Stainless steel or glass shelves in lieu of black | ☐ Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases) |
| ☐ Deli meat pegs | ☐ 6" legs (152mm) |
| ☐ Additional lighted 3500K LED shelf | ☐ Seismic legs |
| ☐ Field Install - High-capacity condensate evaporator assembly - Separate (1500W 120V, 15 AMP circuit required) | ☐ Skirt w/4" casters or legs |
| ☐ Condensate evaporator assembly (field install) (separate 120V, 20A circuit required) (remote only) | ☐ 2 1/2" (63.5mm) recessed or 4" (101.6mm) casters (self-contained models only) (Weight limits may apply) |
| ☐ Remote refrigeration with condensate pump (EEV included) | ☐ Joining kit for continuous line-ups (not available with casters) |
| ☐ Self-cleaning condenser | ☐ Front wire display basket |
| ☐ Rear air intake and discharge | ☐ Front cart bumper |
| ☐ Stainless steel exterior finish | ☐ Black polycarbonate removable locking security cover |

*Additional options available on the website and price list



WARRANTY*
One year Parts and Labor
2nd thru 5th year part only
service compressor
(U.S.A. and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

MODEL	DIMENSIONS (Includes End Panels)
☐ VRSS3660C	36 x 33 x 60 (in) 914 x 838 x 1524 (mm)
☐ VRSS4860C	47.25 x 33 x 60 (in) 1200 x 838 x 1524 (mm)
☐ VRSS6060C	59.25 x 33 x 60 (in) 1505 x 838 x 1524 (mm)
☐ VRSS7260C	71.25 x 33 x 60 (in) 1810 x 838 x 1524 (mm)

STANDARD FEATURES

Model Features

- Black interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant lower end panel construction
- Choice of standard colors on lower end panel
- Black trim
- Adjustable leg levelers
- Cord & plug, self-contained only
- Front air intake / rear discharge or front intake / front discharge
- Energy saving night curtain
- Matches profile of the VRSS & VHSS models

Refrigeration

- R290 Refrigerant
- Electronic temperature control maintains 38° - 40°F (3.3° - 4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- Coated evaporator coil

Shelving

- Two tiers of adjustable black metal shelves with black price tag molding.
- Shelves can be flat or slanted down at 10°

Lighting

- 3500K LED top light

Agency Approvals

- UL, C-UL, and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.

38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)


SYMBOL KEY:

SYMBOL KEY:

① ELECTRICAL JUNCTION BOX
(SUPPLIED W/6" LEADS OR POWER CORD)

☐ TUB DRAIN LOCATION

R REMOTE REFRIGERATION
LINE CONNECTION

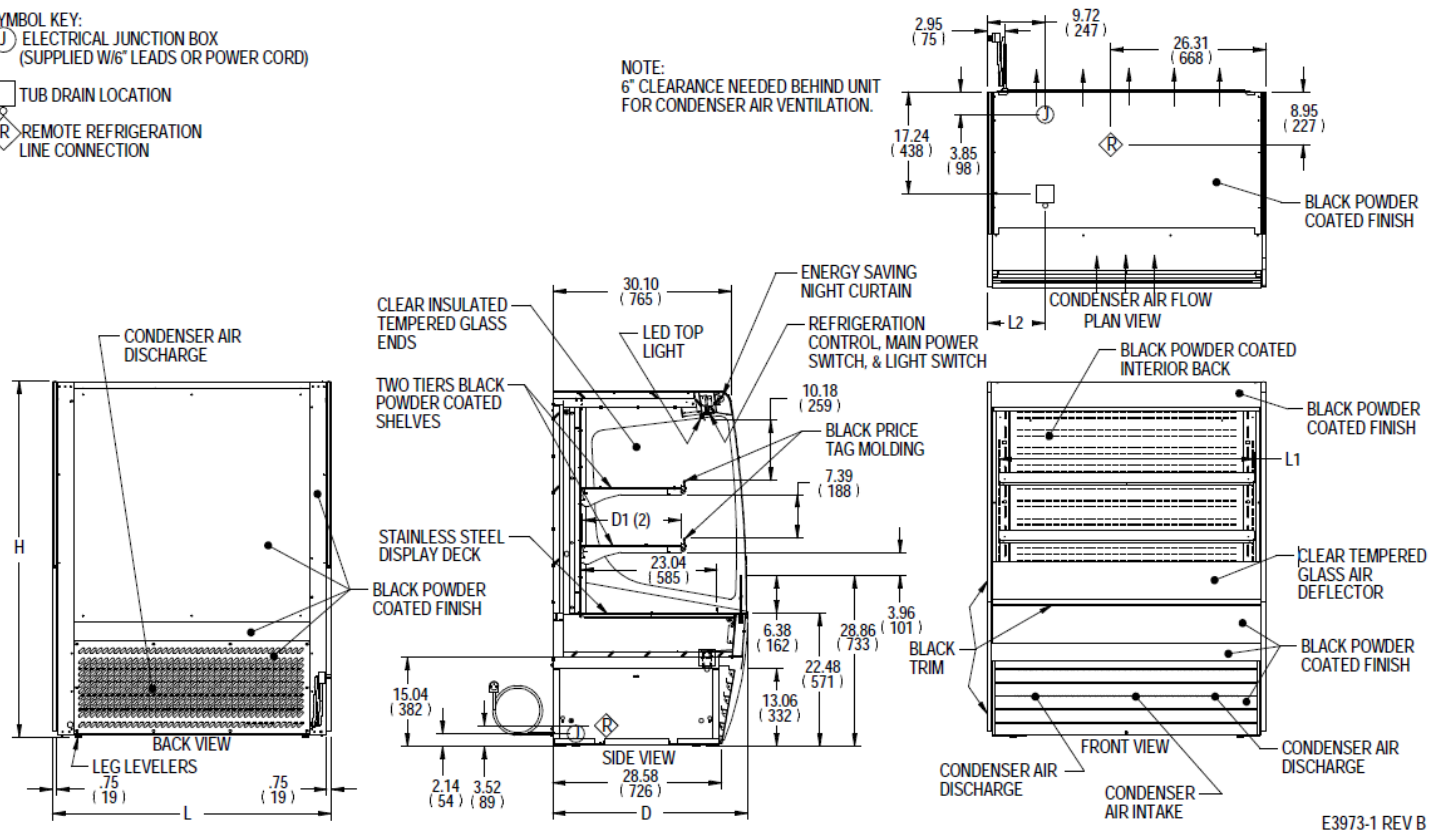

E3973-1 REV B

MODEL	DIMENSIONS			TUB DRAIN	SHELVING		INTERIOR VOLUME CU FT	ELECTRICAL 2 WIRE + GROUND	SELF CONTAINED			REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT LBS KILO	REMOTE		REFRIGERANT	BTU'S @ + 20°	CONDENSATE REMOVAL	SHIP WEIGHT LBS KILO	
				L2	# OF TIERS	L1			D1	STANDARD CONNECTION CORD & PLUG					PERMANENT CONNECT						
	In	D	H	In		In			In	AMP'S	MAX FUSE SIZE				NEMA CORD &	AMP'S					MAX FUSE
	mm	mm	mm	mm		mm			mm	mm	mm				mm	mm					mm
VRSS3660C	36	33	60	6.74	2	32.25	16.634	13.98	120/60/1	16	20	NEMA 5-20P	R290	INTEGRATED PAN	535	2.5	15	R449A	6,720	PUMP	490
	914	838	1524	171		819	423								243						222
VRSS4860C	47.25	33	60	13.49	2	43.25	16.634	18.48	208-240/60/1	11	15	NEMA 6-15P	R290	INTEGRATED PAN	620	3.0	15	R449A	9,580	PUMP	580
	1200	838	1524	343		1099	423								281						263
VRSS6060C	59.25	33	60	14.12	2	55.25	16.634	23.39	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	755	3.5	15	R449A	11,200	PUMP	710
	1505	838	1524	359		1403	423								342						322
VRSS7260C	71.25	33	60	20.12	2	67.25	16.634	28.30	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	845	3.5	15	R449A	12,300	PUMP	800
	1810	838	1524	511		1708	423								383						363

- Due to continuing engineering improvements, specifications are subject to change without notice.
- Case temperature will vary if the air curtain is disrupted.

**FEDERAL INDUSTRIES**

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com