



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

VISION SERIES - High Profile Self-Serve Refrigerated Case - 60"

Designed with impulse sales in mind. Get maximum return from an attention-grabbing case and increase profits.



Model VRSS3660C Solid
Ends Shown

OPTIONAL ACCESSORIES

- | | |
|--|--|
| ☐ 3500K LED lights below shelves | ☐ Graphics package |
| ☐ White interior (including shelves) | ☐ Solid end panels (mirrored interior) |
| ☐ Stainless steel interior (including shelves) | ☐ Reflective end glass |
| ☐ Stainless steel or glass shelves in lieu of black | ☐ Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases) |
| ☐ Deli meat pegs | ☐ 6" legs (152mm) |
| ☐ Additional lighted 3500K LED shelf | ☐ Seismic legs |
| ☐ Field Install - High-capacity condensate evaporator assembly - Separate (1500W 120V, 15 AMP circuit required) | ☐ Skirt w/4" casters or legs |
| ☐ Condensate evaporator assembly (field install) (separate 120V, 20A circuit required) (remote only) | ☐ 2 1/2" (63.5mm) recessed or 4" (101.6mm) casters (self-contained models only) (Weight limits may apply) |
| ☐ Remote refrigeration with condensate pump (EEV included) | ☐ Joining kit for continuous line-ups (not available with casters) |
| ☐ Self-cleaning condenser | ☐ Front wire display basket |
| ☐ Rear air intake and discharge | ☐ Front cart bumper |
| ☐ Stainless steel exterior finish | ☐ Black polycarbonate removable locking security cover |

*Additional options available on the website and price list



WARRANTY*
One year Parts and Labor
2nd thru 5th year part only
service compressor
(U.S.A. and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

MODEL	DIMENSIONS (Includes End Panels)
☐ VRSS3660C	36 x 33 x 60 (in) 914 x 838 x 1524 (mm)
☐ VRSS4860C	47.25 x 33 x 60 (in) 1200 x 838 x 1524 (mm)
☐ VRSS6060C	59.25 x 33 x 60 (in) 1505 x 838 x 1524 (mm)
☐ VRSS7260C	71.25 x 33 x 60 (in) 1810 x 838 x 1524 (mm)

STANDARD FEATURES

Model Features

- Black interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant lower end panel construction
- Choice of standard colors on lower end panel
- Black trim
- Adjustable leg levelers
- Cord & 90 degree plug, self-contained only
- Front air intake / front discharge
- Energy saving night curtain
- Matches profile of the VRSS & VHSS models

Refrigeration

- R290 Refrigerant
- Electronic temperature control maintains 38° - 40°F (3.3° - 4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- Coated evaporator coil

Shelving

- Two tiers of adjustable black metal shelves with black price tag molding.
- Shelves can be flat or slanted down at 10°

Lighting

- 3500K LED top light

Agency Approvals

- UL, C-UL, and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant


AIA #	VISION SERIES - High Profile Self-Serve Refrigerated Case - 60"
SIS #	
Product Specifications	

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.		
Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)
 DIMENSION TOLERANCE +/- 0.25 (6.4)

SYMBOL KEY:

SYMBOL KEY:
 (J) ELECTRICAL JUNCTION BOX
 (SUPPLIED W/6' LEADS OR POWER CORD)
 (T) TUB DRAIN LOCATION
 (R) REMOTE REFRIGERATION
 LINE CONNECTION

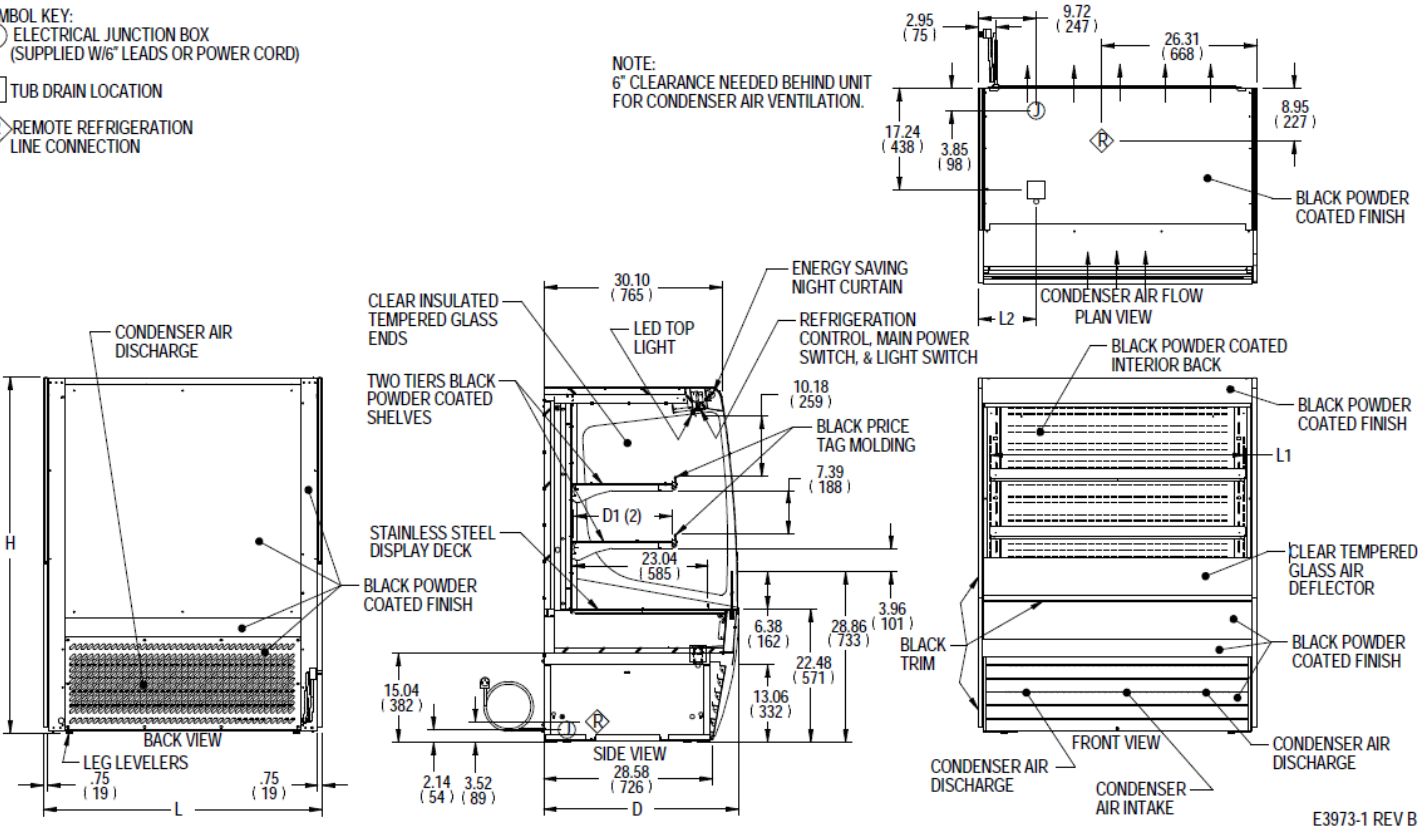

MODEL	DIMENSIONS			TUB DRAIN	SHELVING			INTERIOR VOLUME CU FT	ELECTRICAL	SELF CONTAINED					REMOTE						
	L	D	H	L2	# OF TIERS	L1	D1			STANDARD CONNECTION CORD & PLUG			REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	PERMANENT CONNECT		REFRIGERANT	BTU'S @ + 20°	CONDENSATE REMOVAL	SHIP WEIGHT
	in	in	in	in		in	in			AMPS	MAX FUSE SIZE	NEMA CORD &				AMPS	MAX FUSE				
	mm	mm	mm	mm		mm	mm														
	mm	mm	mm	mm		mm	mm														
VRSS3660C	36	33	60	6.74	2	32.25	16.634	13.98	120/60/1	16	20	NEMA 5-20P	R290	INTEGRATED PAN	535	2.5	15	R449A	6,720	PUMP	490
	914	838	1524	171		819	423								243						222
	47.25	33	60	13.49		43.25	16.634								1099						423
VRSS4860C	1200	838	1524	343	2	1099	423	18.48	208-240/60/1	11	15	NEMA 6-15P	R290	INTEGRATED PAN	281	3.0	15	R449A	9,580	PUMP	580
	59.25	33	60	14.12		55.25	16.634								1403						423
VRSS6060C	1505	838	1524	359	2	1403	423	23.39	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	342	3.5	15	R449A	11,200	PUMP	710
	71.25	33	60	20.12		67.25	16.634								1708						423
VRSS7260C	1810	838	1524	511	2	1708	423	28.30	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	383	3.5	15	R449A	12,300	PUMP	800

- Due to continuing engineering improvements, specifications are subject to change without notice.
- Case temperature will vary if the air curtain is disrupted.



FEDERAL INDUSTRIES
 A Standex Company
 215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: Geninfo@Federalind.com
Website: Federalind.com