



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

VISION SERIES - Square Ends Self-Serve Refrigerated Slide-In Display Case - 60"

Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits.



Curved End Shown

MODEL	DIMENSIONS (Includes End Panels)
☐ VRSS3660S-SLD	36 x 33 x 71.62 (in) 914 x 838 x 1819 (mm)
☐ VRSS4860S-SLD	47.25 x 33 x 71.6 (in) 1200 x 838 x 1819 (mm)
☐ VRSS6060S-SLD	59.25 x 33x 71.6 (in) 1505 x 838 x 1819 (mm)
☐ VRSS7260S-SLD	71.25 x 33x 71.6 (in) 1810 x 838 x 1819 (mm)

STANDARD FEATURES

Model Features

- Black interior including shelves
- Stainless steel display deck
- Tempered glass upper end panels
- Black powder coated base frame
- Choice of glass or solid ends
- Choice of white or black paint or standard laminate colors
- Black trim
- Rear air intake and discharge
- Adjustable height casters (36" & 72" L models come with 30 AMP plug)
- Cord & 90 degree plug
- Energy saving night curtain

Refrigeration

- R290 Refrigerant
- Electronic temperature control maintains 38°-40°F (3.3°-4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- /2yr/5y/10y t l y
- Coated evaporator coil

Shelving

- Two tiers of adjustable black metal shelves with black price tag molding
- Shelves can be flat or slanted down at 10°

Lighting

- 3500K LED top light

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

OPTIONAL ACCESSORIES

- ☐ White interior (including shelves)
- ☐ Stainless steel interior (including shelves)
- ☐ Stainless steel shelves in lieu of black
- ☐ Additional lighted 3500K LED shelf
- ☐ opnlly [95 flkua oSt20 akSt0Sa
- ☐ Deli meat pegs
- ☐ High output condo pan - self-contained units only (60" & 72" L models come with 30 AMP plug)
- ☐ Self-cleaning condenser
- ☐ {u l y t S a a u i S S t S e i S u a z u t i y a k
- ☐ w S t S o u o S f l a a S y R l i y S t a
- ☐ { 2 0 R S y R l i y S t a o Y a u u z u S R i y i S u a z u u
- ☐ t u S Y a d z Y S e i S u a z u f l i Y i y i u S o d z l j u S n a z 0 R
- ☐ S y R a z y r e u

- ☐ Graphics package
- ☐ Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases)
- ☐ Black polycarbonate removable locking security cover
- ☐ Roll-Down locking security cover (black, white, or gray)
- ☐ Clear sliding rear access door (Solid hinged door on 36" model)
- ☐ Cord exit bottom of case
- ☐ Slanted milk crate deck

*Additional options available on the website and price list.



Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

AIA #	<h1>VISION SERIES - Square Ends Self-Serve Refrigerated Slide-In Display Case - 60"</h1> <h2>Product Specifications</h2>
SIS #	

Intended Environment: Type I -Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.		
Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)

SYMBOL KEY:

① ELECTRICAL JUNCTION BOX (SUPPLIED W/POWER CORD)

□ TUB DRAIN LOCATION

NOTE:

CLEARANCE REQUIRED BEHIND UNIT FOR CONDENSER AIR VENTILATION


UNIT FRONT HAS A SOLID PANEL AND UNIT CAN BE ROLLED INTO A CABINET

BASE LEGS AND CASTERS

BASE LEGS ARE ADJUSTABLE IN 1/2" INCREMENTS AND CASTERS ARE ADJUSTABLE UP TO 1" FOR FINE TUNE ADJUSTMENTS.

LEGS AND CASTERS MAKE UNIT ADJUSTABLE FROM 32" TO 38" COUNTER HEIGHTS

DIMENSIONS SHOWN ARE FOR A 34" COUNTER HEIGHT

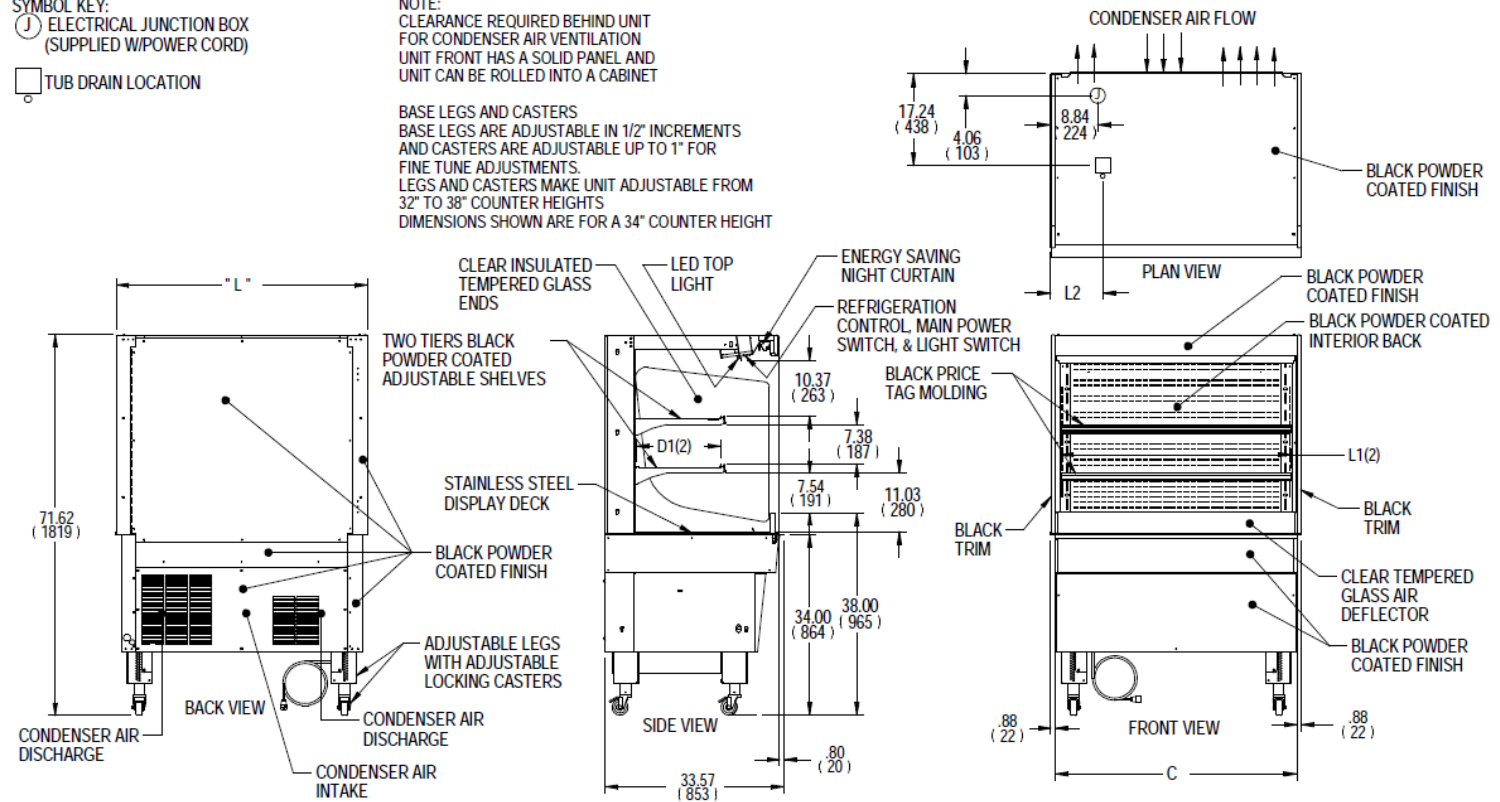

E3973-3 REV A

												SELF CONTAINED					
MODEL	DIMENSIONS				COUNTER	TUB DRAIN	SHELVING			INTERIOR VOLUME CU FT	ELECTRICAL	STANDARD CONNECTION			REFRIGERANT	CONDENSATE REMOVAL	SHIP
	L	D	H	C	CUTOUT	L2	# OF TIERS	L1	D1			CORD & PLUG					WEIGHT
	in	in	in	in	in	in		in	in			AMPS	MAX FUSE SIZE	NEMA CORD &			LBS
	mm	mm	mm	mm	mm	mm		mm	mm								KILO
VRSS3660S-SLD	36	33	71.6	34.5	35.25	6.74	2	32.25	16.634	13.98	120/60/1	16	20	NEMA 5-20P	R290	INTEGRATED PAN	535
	914	838	1819	876	895	171		819	423								243
VRSS4860S-SLD	47.25	33	71.6	45.5	46.25	13.49	2	43.25	16.634	18.48	208-240/60/1	11	15	NEMA 6-15P	R290	INTEGRATED PAN	620
	1200	838	1819	1156	1175	343		1099	423								281
VRSS6060S-SLD	59.25	33	71.6	57.5	58.25	14.12	2	55.25	16.634	23.39	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	755
	1505	838	1819	1461	1480	359		1403	423								342
VRSS7260S-SLD	71.25	33	71.6	69.5	70.25	20.12	2	67.25	16.634	28.30	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	845
	1810	838	1819	1765	1784	511		1708	423								383

- Case temperature will vary if the air curtain is disrupted.
- Due to continuing engineering improvements, specifications are subject to change without notice



FEDERAL INDUSTRIES
A Standex Company
215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: Geninfo@Federalind.com
Website: Federalind.com