



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

VISION SERIES - Curved End Self-Serve Refrigerated Case - 78"

Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits.



Model VRSS7278C Shown
with Options

MODEL	DIMENSIONS (Includes End Panels)
☐ VRSS3678C	36 x 33 x 78 (in) 914 x 838 x 1981 (mm)
☐ VRSS4878C	47.25 x 33 x 78 (in) 1200 x 838 x 1981 (mm)
☐ VRSS6078C	59.25 x 33 x 78 (in) 1505 x 838 x 1981 (mm)
☐ VRSS7278C	71.25 x 33 x 78 (in) 1810 x 838 x 1981 (mm)

STANDARD FEATURES

Model Features

- Black interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant end panel construction
- Choice of standard colors on lower millwork panel
- Black trim
- Adjustable leg levelers
- Cord & 90 degree plug, self-contained only
- Front air intake / front discharge
- Energy saving night curtain
- Matches profile of the VRSS & VHSS models

Refrigeration

- R290 Refrigerant
- Electronic temperature control maintains 38°-40°F (3.3°-4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- Coated evaporator coil

Shelving

- Four tiers of adjustable black metal shelves with black price tag molding.
- Shelves can be flat or slanted down at 10°.

Lighting

- 3500K LED top light

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I Conditions
- DOE 2017 compliant

OPTIONAL ACCESSORIES

- ☐ 3500K LED lights below shelves
- ☐ White interior (including shelves)
- ☐ Stainless steel interior (including shelves)
- ☐ Stainless steel or glass shelves in lieu of black
- ☐ Deli meat pegs
- ☐ Additional lighted 3500K LED shelf
- ☐ High output condo pan - self-contained units only
- ☐ Condensate evaporator assembly (field install) (separate 120V, 20A circuit required) (remote only)
- ☐ Remote refrigeration with condensate pump (EEV included)
- ☐ Self-cleaning condenser
- ☐ Rear air intake / rear discharge
- ☐ Stainless steel exterior finish
- ☐ Graphics package
- ☐ Solid end panels (mirrored interior)
- ☐ Reflective end glass
- ☐ Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases)
- ☐ 6" legs (152mm)
- ☐ Seismic legs
- ☐ Skirt w/4" casters or legs
- ☐ 2 1/2" (63.5mm) recessed or 4" (101.6mm) casters (self-contained models only) (Weight limits may apply)
- ☐ Joining kit for continuous line-ups (not available with casters)
- ☐ Front wire display basket
- ☐ Front cart bumper
- ☐ Black polycarbonate removable locking security cover

*Additional options available on the website and price list



WARRANTY*
One year Parts and Labor
2nd thru 5th year part only
service compressor
(U.S.A. and Canada)


Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

AIA #	VISION SERIES - Curved End Self-Serve Refrigerated Case - 78"	
SIS #	Product Specifications	

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.		
Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)
 DIMENSION TOLERANCE +/- 0.25 (6.4)

SYMBOL KEY:
 (J) ELECTRICAL JUNCTION BOX
 (SUPPLIED W/6' LEADS OR POWER CORD)
 (T) TUB DRAIN LOCATION
 (R) REMOTE REFRIGERATION
 LINE CONNECTION

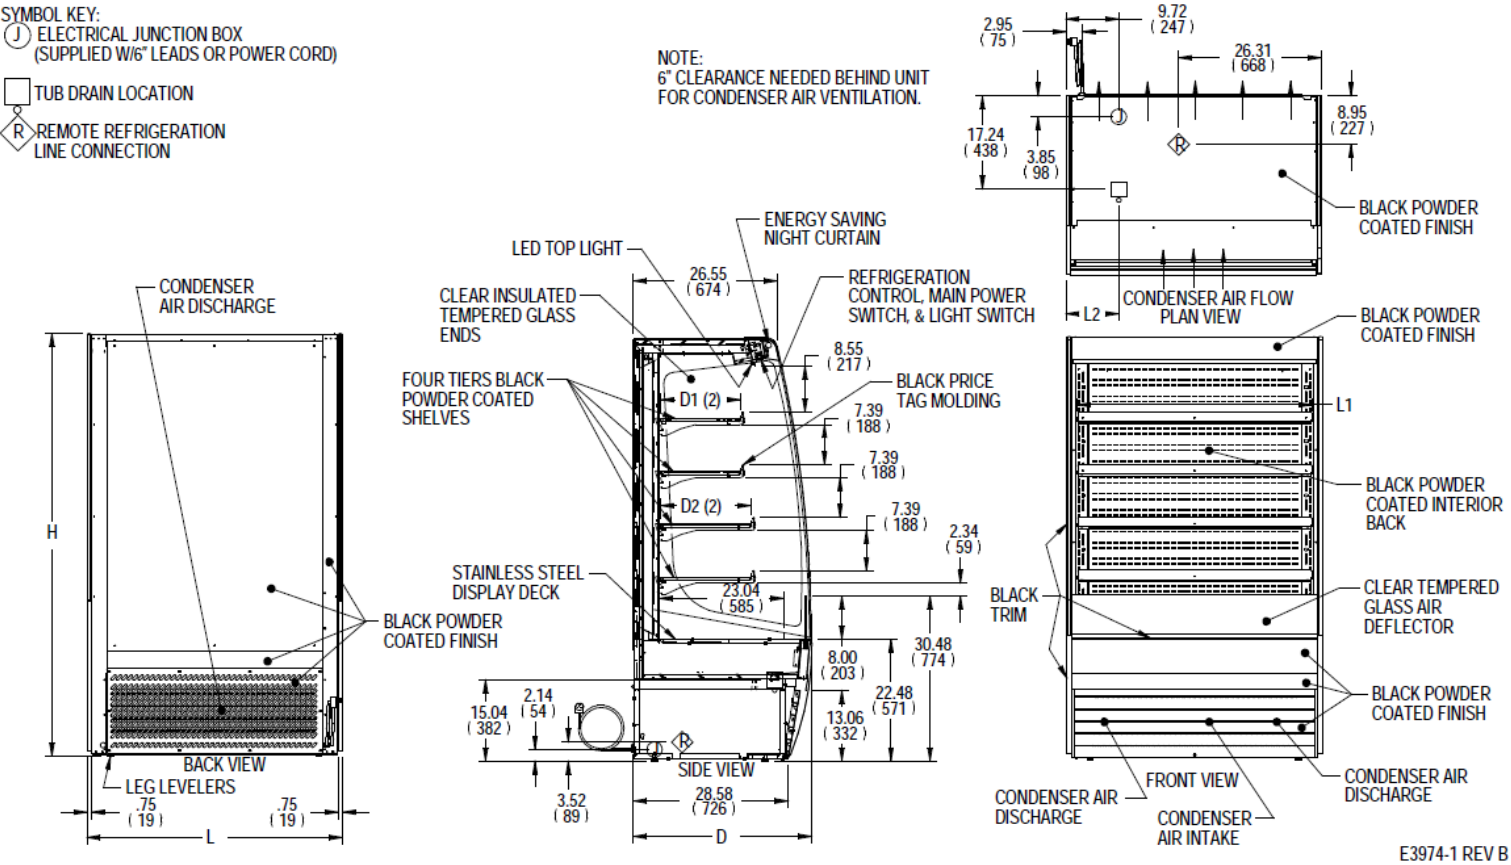

E3974-1 REV B

MODEL	DIMENSIONS			TUB DRAIN	# OF TIERS	SHELVING			INTERIOR VOLUME CU FT	ELECTRICAL	SELF CONTAINED			REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	PERMANENT CONNECT		REFRIGERANT	BTU'S @ + 20°	CONDENSATE REMOVAL	SHIP WEIGHT	
	L	D	H	L2		L1	D1	D2			CORD & PLUG						AMPS	MAX FUSE SIZE					NEMA CORD &
	in	in	in	in		in	in	in			2 WIRE + GROUND	AMPS	MAX FUSE SIZE			NEMA CORD &						LBS	
	mm	mm	mm	mm		mm	mm	mm									KILO						
VRSS3678C	36	33	78	6.74	4	32.25	14.634	16.634	19.47	120/60/1	16.0	20	NEMA 5-20P	R290	INTEGRATED PAN	740	2.5	15	R449A	6,720	PUMP	695	
	914	838	1981	171		819	372	423								336						315	
	47.25	33	78	13.49		43.25	14.634	16.634								1099						372	423
VRSS4878C	1200	838	1981	343	4	55.25	14.634	16.634	25.74	208-240/60/1	11.0	15	NEMA 6-15P	R290	INTEGRATED PAN	820	3.0	15	R449A	9,580	PUMP	775	
	59.25	33	78	14.12		1403	372	423								467						351	
VRSS6078C	1505	838	1981	359	4	67.25	14.634	16.634	32.58	208-240/60/1	16.0	20	NEMA 6-20P	R290	INTEGRATED PAN	1030	3.5	15	R449A	11,200	PUMP	985	
	71.25	33	78	20.12		1708	372	423								490						472	
VRSS7278C	1810	838	1981	511	4	1708	372	423	39.42	208-240/60/1	16.0	20	NEMA 6-20P	R290	INTEGRATED PAN	1080	3.5	15	R449A	12,300	PUMP	1040	

- Due to continuing engineering improvements, specifications are subject to change without notice
- Case temperature will vary if the air curtain is disrupted.



FEDERAL INDUSTRIES
 A Standex Company
 215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: Geninfo@Federalind.com
Website: Federalind.com