

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: Geninfo@Federalind.com Website: Federalind.com

Project Name:	AIA #
Item #:	
Model #: Qty:	SIS#

High-Profile Self-Serve Refrigerated Milk Merchandiser 78"H X 40"D X 50"W

Designed for schools to enhance ease of merchandising for K-12 grades while also accommodating sales of other items for higher grades in one attractive package



Shown with optional rear sliding doors and roll down security cover

☐ Additional Shelf Depths **OPTIONAL ACCESSORIES** ☐ Roll-down Security Cover - white □ Special External Laminate □ Removable Security Cover Finish ☐ Reflective End Glass □ Black Interior (Including) ☐ Graphic wrap Shelving) ☐ Sliding Rear Access Doors (Clear ☐ Stainless Steel Exterior Finish or Reflective) ☐ Stainless Steel Interior □ Rear door locks ☐ Additional Lighted LED Shelf (If Using Single Layer Of Milk Crates)

*Additional options available on the website and price list.











WARRANTY* e year Parts and Labor I thru 5th year part only service compressor (U.S.A. and Canada) Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

MODEL 49.7 x 40.2 x 78 (in) ☐LMDM4878SC 1262 x 1021 x 1981 (mm)

DIMENSIONS

STANDARD FEATURES

Model Features

Approval:

- Choice of six standard laminates on exterior
- Black metal front kick plate and trim with galvanized steel back
- · White interior
- Moisture resistant end panel construction with field replaceable tempered thermo-
- Condenser air filter cleaning indicator light
- Easy to remove washable condenser air filter
- Energy saving night curtain
- · Cord and plug
- Recessed casters with rear located floor
- Stainless steel slanted display deck to merchandise up to 12 milk crates (13"X13")
- Front access catch pan for broken milk containers

Refrigeration

- Electronic temperature control with on demand defrost
- PTC Condensate heater provided for a totally self-contained system
- Refrigeration controls maintain 35°-38°F (1.6°-3.3°C)
- Note: Case temperature will vary if the air curtain is disrupted
- Insulated with high-density urethane foam
- Thermometer
- R290 refrigerant, EPA SNAP compliant

Shelving

- One adjustable white metal shelf with LED light and price tag molding.
- Shelf can be flat or slanted downward at 10°

• 3500K LED top and shelf light, DLC certified, IP 65 rated

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant

AIA#

High-Profile Self-Serve Refrigerated Milk Merchandiser 78"H X 40"D X 50"W

SIS#


Product Specifications

Intended Environment: Type I (Self Contained) - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity.

Zone Intended Product To Be Displayed		Intended Product To Be Displayed	Avg prod temp °F / °C
	All	Packaged Refrigerated Products	35 -38°F / (1.6 - 3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE+/-0.25(6.4)

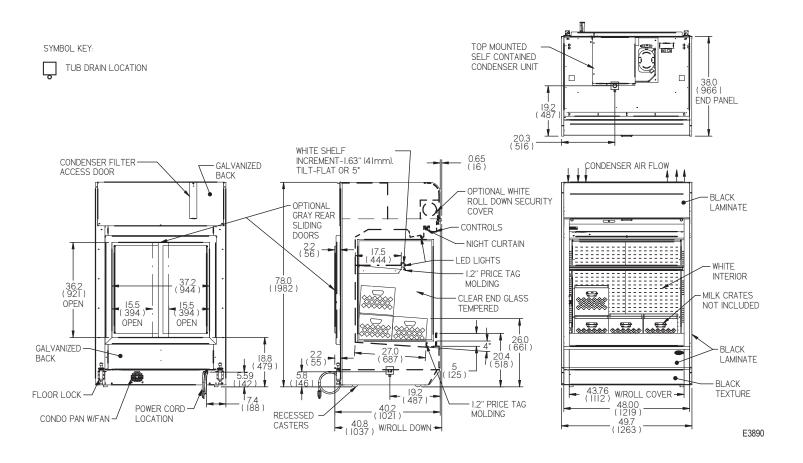

MODEL	DIMENSIONS			- SHELVES	SHIPPING WHT		SELF CONTAINED		NEMA PLUG	
	L	D	н	UNITS	SHELVES !	LBS	KILO	VOLTAGE	AMPS	CONFIG
LMDM4878SC	49.7	40.2	78	in	1	1150	F00	200 2/0//0/1	MAY FLICE 20	/ 20D
LIVIDIVI 107030	1262	1021	1981	mm	'	1150	1150 522	208-240/60/1	MAX FUSE 20	6-20P

- Case temperature will vary if the air curtain is disrupted.
- A 208-240 volt, 60 hertz, 1 phase, 2-wire plus ground power supply is required.
- Due to continuing engineering improvements, specifications are subject to change without notice.









Email: Geninfo@Federalind.com **Website:** Federalind.com